



## STAFF REPORT

**TO:** Board of Directors / Standing Advisory Committee  
**THRU:** Mark Foree, General Manager  
**FROM:** Michele Sullivan, Chief Financial Officer  
**DATE:** May 9, 2016  
**SUBJECT:** **Discussion and action on request for adoption of Resolution No. 241: A Resolution to Adopt the Final Budget for the Fiscal Year Ending June 30, 2017 and the 2017-2021 Five-Year Capital Improvement Plan**

---

### Recommendation

That the TMWA Board approve the revised Tentative Budget as the adopted Final Budget for the fiscal year ending June 30, 2017 and direct staff to file the adopted Final Budget and related 2017-2021 Capital Improvement Plan with the State of Nevada Department of Taxation as required by statute.

### Summary

TMWA has prepared the revised Tentative Budget for final consideration and approval by the TMWA Board. Changes to the tentative budget presented at the March 16, 2016 board meeting result in a favorable increase in the change in net position of \$1.3M, from \$3.7M to \$5.0M. This is mainly due to savings of \$825K in interest expense related to the refunding of TMWA's 2006 Revenue Bonds in April, 2016, and decreases in estimates for power expenses of \$500k due to more reliance on surface water in the upcoming summer peak season. CIP spending for 2017-2021 increased from \$149.9M to \$153.4M, or \$3.5M due to incremental additions of \$1.6M for replacement of the penstock at the Fleish hydroelectric plant in 2017, \$1.2M for additional street and highway main replacements in 2017, and \$0.7M for well recharge retrofit over the next five years. Cash and cash equivalents balances decreased from \$157.9M to \$149.2M, or \$8.3M for the end of budget year 2017. This is mainly due to the redemption of \$6M of commercial paper in May of 2016, thus decreasing the opening balance in cash for FY2017, and increases in CIP spending of \$2.6M related to FY2017.

### Discussion

TMWA has prepared the revised Tentative Budget for final consideration and approval by the TMWA Board. A Tentative Budget report was presented at the March 16, 2016 board meeting

and a comparison of the revised Tentative Budget to the original approved Tentative Budget is accompanying this report in *Attachments A-1 and A-2*. A draft CIP document was presented at the March 16, 2016 board meeting and a revised draft CIP document is accompanying this report in *Attachment B*. There are changes to the original presented Tentative Budget as a result of Board member comments, further management evaluation and results from a very successful refunding (refinancing) of TMWA's 2006 Revenue Bonds. The changes are as follows:

- Although, hydroelectric revenues were expected through October 2016, based on current river flow estimates, hydroelectric plants will operate through September 2016. This has been incorporated into the budget resulting in a decrease of anticipated hydroelectric revenue of \$143.8K. Inspection fees and construction water sales resulting from increased development activity have been incorporated into the budget resulting in an increase of anticipated revenue of \$145.5K.
- With drought conditions somewhat abated more reliance on surface water will occur in fiscal year 2017 rather than groundwater in fiscal year 2016. As a result, the previously tentatively budgeted electric power expense has been reduced by \$500K in 2017.
- A very successful refunding of the 2006 Revenue Bonds has reduced interest expense by \$825k for fiscal year 2017. The refunding transaction occurred in April after the presentation of the tentative budget at the March board meeting.
- Ending cash and investment balances are expected to decrease by \$8.7M compared to the tentative budget. \$93.8M in outstanding commercial paper has been reduced to \$87.8M in May 2016. The \$6.0M reduction is due to redemptions funded by developer will serves issued prior to 2017 fiscal year. Consequently, the redemption has decreased beginning year cash and equivalents that were tentatively budgeted. Additional spending on CIP of \$2.6M in FY2017 is the other main driver in the decrease to cash balances in 2017.
- CIP spending for 2017-2021 increased from \$149.9M to \$153.4M, or \$3.5M. Additions include \$1.6M for replacement of the penstock at the Fleish hydroelectric plant in 2017, \$1.2M for additional street and highway main replacements in 2017 to coordinate main replacements with additional repaving planned by other entities, and \$0.7M for well recharge retrofit over the next five years. Spending for fiscal year 2017 increased from \$40.9M to \$43.5M, or \$2.6M. The complete CIP document with detailed project descriptions, cost allocation and prioritization of spending is included in *Attachment B*.

The proposed final FY 2017 budget includes a contribution of \$20K to Nevada Land Trust to assist with the One Truckee River initiatives related to improving Truckee River water quality. This was discussed at the April 20, 2016 board meeting.

**TRUCKEE MEADOWS WATER AUTHORITY  
SCHEDULE OF REVENUES, EXPENSES  
AND CHANGES IN NET POSITION  
FOR THE FISCAL YEARS ENDED JUNE 30, 2017**

	<b>Proposed Final Fiscal Year 2017 Total</b>	<b>Presented Tentative Fiscal Year 2017 Total</b>	<b>Increase (Decrease)</b>
<b>OPERATING REVENUES</b>			
Charges for water sales	\$ 88,833,746	\$ 88,833,746	\$ -
Hydroelectric sales	1,755,890	1,899,704	\$ (143,814)
Other operating sales	2,471,500	2,326,000	145,500
Total Operating Revenues	93,061,136	93,059,450	1,686
<b>OPERATING EXPENSES</b>			
Salaries and wages	18,319,615	18,319,615	-
Employee benefits	9,332,796	9,332,796	-
Services and supplies	26,078,715	26,578,715	(500,000)
Total Operating Expenses before Depreciation	53,731,126	54,231,126	(500,000)
Depreciation	33,247,620	33,196,668	50,952
Total Operating Expenses	86,978,746	87,427,794	(449,048)
Operating Income	6,082,390	5,631,656	450,734
<b>NONOPERATING REVENUES (EXPENSES)</b>			
Investment Earnings	2,231,304	2,231,304	-
Unrealized gain on investments	-	-	-
Gain (Loss) on disposal of assets	-	-	-
Amortization of bond/note issuance costs	(474,444)	(474,444)	-
Interest expense	(16,930,176)	(17,755,332)	825,156
Other non-operating revenue	-	-	-
Other non-operating expenses	-	-	-
Total Nonoperating Revenues (Expenses)	(15,173,316)	(15,998,472)	825,156
Income (Loss) before Capital Contributions	(9,090,926)	(10,366,816)	1,275,890
<b>CAPITAL CONTRIBUTIONS</b>			
Grants	150,000	150,000	-
Water meter retrofit program	1,619,256	1,619,256	-
Developer infrastructure contributions	-	-	-
Developer will-serve contributions (net of refunds)	4,615,656	4,615,656	-
Developer capital contributions-other	3,165,144	3,165,144	-
Developer facility charges (net of refunds)	4,509,144	4,509,144	-
Contributions from others	-	-	-
Contributions from other governments	-	-	-
Net Capital Contributions	14,059,200	14,059,200	-
Change in Net Position	4,968,274	3,692,384	1,275,890
<b>NET POSITION , BEGINNING OF YEAR</b>	<b>\$ 560,575,086</b>	<b>\$ 560,575,086</b>	<b>\$ -</b>
<b>NET POSITION, END OF YEAR</b>	<b>\$ 565,543,360</b>	<b>\$ 564,267,470</b>	<b>\$ 1,275,890</b>

**TRUCKEE MEADOWS WATER AUTHORITY  
STATEMENTS OF CASH FLOWS  
FOR THE YEARS ENDED JUNE 30, 2017**

	<b>Proposed Final Fiscal Year 2017 Total</b>	<b>Presented Tentative Fiscal Year 2017 Total</b>	<b>Increase (Decrease)</b>
<b>INCREASE (DECREASE) IN CASH AND CASH EQUIVALENTS</b>			
<b>CASH FLOWS FROM OPERATING ACTIVITIES</b>			
Cash received from customers	\$ 93,061,136	\$ 93,059,450	\$ 1,686
Cash paid to employees	(27,652,411)	(27,652,411)	-
Cash paid to suppliers	(26,078,715)	(26,578,715)	500,000
Net Cash Provided by Operating Activities	<u>39,330,010</u>	<u>38,828,324</u>	<u>501,686</u>
<b>CASH FLOWS FROM CAPITAL AND RELATED FINANCING ACTIVITIES</b>			
Acquisition and construction of capital assets	(43,485,000)	(40,935,000)	(2,550,000)
Interest paid on financing	(16,154,600)	(15,870,414)	(284,186)
Principal paid on financing	(14,234,845)	(14,234,845)	-
Proceeds from capital debt issuance	-	-	-
Redemptions of commercial paper notes	(4,400,000)	(4,400,000)	-
Proceeds from refunding bonds	-	-	-
Proceeds transferred to refunding/redemption escrow	-	-	-
Proceeds (spending) from (on) capital asset disposal	-	-	-
Contributions for water meter retrofit program	1,619,256	1,619,256	-
Contributions from developers-will-serve letters	4,615,656	4,615,656	-
Contributions from developers-other	3,165,144	3,165,144	-
Contributions from developers-facility charges	4,509,144	4,509,144	-
Contributions from (to) others	-	-	-
Contributions from (to) other governments	-	-	-
Grants	150,000	150,000	-
Bond/Note issuance costs	(440,820)	(440,820)	-
Net Cash (Used) by Capital and Related Financing Activities	<u>(64,656,065)</u>	<u>(61,821,879)</u>	<u>(2,834,186)</u>
<b>CASH FLOWS FROM INVESTING ACTIVITIES</b>			
Interest received	<u>2,404,344</u>	<u>2,404,344</u>	<u>-</u>
Net Increase (Decrease) in Cash and Cash Equivalents	<u>(22,921,711)</u>	<u>(20,589,211)</u>	<u>(2,332,500)</u>
<b>CASH AND CASH EQUIVALENTS, BEGINNING OF YEAR</b>	<u>\$ 172,500,000</u>	<u>178,500,000</u>	<u>(6,000,000)</u>
<b>CASH AND CASH EQUIVALENTS, END OF YEAR</b>	<u>\$ 149,578,289</u>	<u>157,910,789</u>	<u>(8,332,500)</u>

**Attachment A-2**

**TRUCKEE MEADOWS WATER AUTHORITY**  
**(TMWA)**

**RESOLUTION NO. 241**

**A RESOLUTION ADOPTING THE FINAL BUDGET  
AND CAPITAL IMPROVEMENT PLAN FOR THE  
TRUCKEE MEADOWS WATER AUTHORITY AFTER PUBLIC HEARING**

WHEREAS, pursuant to NRS 354.596, TMWA is required to hold a public hearing on its tentative budget to allow interested persons to be heard; and

WHEREAS, pursuant to NRS 354.596, TMWA scheduled and held a public hearing on the tentative budget and Capital Improvement Plan as prescribed on May 18, 2016, the third Wednesday in May; and

WHEREAS, the tentative budget and Capital Improvement Plan have been presented to the interested public and the Board; and

WHEREAS, the Board has considered and approved the revisions to the tentative budget and Capital Improvement Plan and has heard and considered comments from the public.

NOW, THEREFORE, BE IT RESOLVED by the Board of Directors of the Truckee Meadows Water Authority to adopt the tentative budget as the final budget for fiscal year 2016-2017 and adopt the Capital Improvement Plan and to direct staff to submit the final budget and Capital Improvement Plan to the State of Nevada Department of Taxation.

Upon motion of \_\_\_\_\_, seconded by \_\_\_\_\_, the foregoing Resolution was passed and adopted on May 18, 2016 by the following vote of the Board:

Ayes: \_\_\_\_\_

Nays: \_\_\_\_\_

Abstain: \_\_\_\_\_ Absent: \_\_\_\_\_

Approved: \_\_\_\_\_

\_\_\_\_\_  
Geno Martini, Chairman

Truckee Meadows Water Authority  
Resolution 241 (continued)

STATE OF NEVADA,        )  
  : ss.  
COUNTY OF WASHOE.    )

On this 18th day of May, 2016, Geno Martini, Chairman of the Board of Truckee Meadows Water Authority, personally appeared before me, a Notary Public in and for said County and State, and acknowledged that he executed the above instrument freely and voluntarily and for the purposes therein mentioned.

\_\_\_\_\_  
Notary Public



June 2016



# *Five Year Capital Improvement Plan*

*Fiscal Year 2017 - 2021*

*Truckee Meadows Water Authority is a not-for-profit, community-owned water utility, overseen by elected officials and citizen appointees from Reno, Sparks, and Washoe County*



## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

**Table of Contents**

INTRODUCTION.....	5
DEFINITIONS .....	8
PRIORITIZATION OF PROJECTS/OUTLAYS .....	9
FUNDING OF CAPITAL SPENDING .....	10
FISCAL YEAR 2017 CAPITAL SPENDING-THE CAPITAL BUDGET.....	13
SUMMARY OF PROJECTS FOR THE FISCAL YEAR 2017 BUDGET .....	14
CAPITAL EXPENDITURES BY FUNCTION (Amounts in thousands of dollars).....	16
PRELIMINARY FUNDING PLAN FUNDING SOURCES (Amounts in thousands of dollars).....	17
FUNDING BY PRIORITY (Amounts in thousands of dollars).....	18
PROJECT FUNCTIONS AND DESCRIPTIONS.....	19
RAW WATER SUPPLY IMPROVEMENTS Summary.....	19
Highland Canal-Upgrades-Downstream FY 2017 – 2021 .....	21
Highland Canal – Upgrades – Diversion to Chalk Bluff FY 2017 – 2021.....	22
Donner Dam Improvements FY 2017 .....	23
Indirect Potable Reuse FY 2017 – 2021.....	24
TROA Implementation FY2017 - 2019 .....	25
GROUND WATER SUPPLY IMPROVEMENTS Summary.....	26
Well Rehabilitation Improvements FY 2017 – 2021 .....	28
Well Bypass and Chlorine Room Improvements (former STMGID wells) FY 2017 – 2021 .....	29
Double Diamond (#3 Equip) FY 2017.....	30
Double Diamond (#4 Equip) FY 2021 .....	31
Campello Capacity Increase FY 2018.....	32
Ground Water Supply Improvements.....	33
Callamont Well Equip FY 2020.....	33
Air Guard Well Replacement FY 2017.....	34
Desert Springs Well #4 Recharge FY 2019 .....	35
Sunrise #3 Replacement FY 2017.....	36
Bedell Flat Water Bank FY 2017 – FY 2021 .....	37
STMGID Well #1 Replacement FY 2017 .....	38
Well Fix & Finish FY 2017 – 2021.....	39

## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

TREATMENT PLANT IMPROVEMENTS Summary .....	41
Treatment Plants General Fix & Finish FY 2017 – 2021 .....	43
Eagle Canyon Transmission Main Phase 2 FY 2017 – 2018 .....	44
Truckee Canyon Water Treatment Improvements FY 2017 - 2021 .....	45
Lightning W Treatment Improvements FY 2017 – 2021 .....	46
SCADA Rehab/Plant Operating Software FY 2017 - 2021 .....	47
Mt. Rose Surface Water Treatment Plant FY 2017 - 2018 .....	48
DISTRIBUTION SYSTEM IMPROVEMENTS – PRESSURE IMPROVEMENTS Summary .....	49
Pressure Regulators Rehabilitation FY 2017 - 2021 .....	51
Pressure Reducing Valve (Roll Seal) Removal FY 2017 – 2021 .....	52
Land Acquisition FY 2017 – 2021 .....	53
Desert Springs Pressure Improvements FY 2018.....	54
Paloma Booster Pump Station/Pressure Regulating Station/Main FY 2018.....	55
Longley Booster Pump Station/Double R Capacity Increase FY 2019.....	56
Pump Station Oversizing FY 2017 – 2021.....	57
Pump Station Rebuilds, Rehabilitations FY 2017 – 2021 .....	58
D’Andrea #3 Pump Station (developer direct cost) FY 2017 .....	59
Truckee River Highlands PS #1 FY 2021 .....	60
Distribution System Improvements – Pressure Improvements .....	61
NAC Deficiencies-Saddlehorn, Upper Toll Road, STMGID East FY 2017 – 2021 .....	61
Distribution System Improvements – Pressure Improvements .....	62
Mount Rose Well #3 Pump Station Improvements FY 2018 – 2019.....	62
Standby Generator Replacements FY 2017 – 2021 .....	63
Idlewild BPS Improvements FY 2019 – 2020 .....	64
DISTRIBUTION SYSTEM IMPROVEMENTS – WATER MAIN-DISTRIBUTION-SERVICE LINE IMPROVEMENTS Summary .....	65
Street & Highway Main Replacements FY 2017 - 2021.....	67
Stead Main Replacement Phase II FY 2017.....	68
Hidden Valley Intertie Pumping Capacity FY 2017 .....	69
California-Marsh 24" Main Replacement FY 2017 - 2018.....	70
Booth, Sharon Way, Monroe 24" Main Replacements FY 2019 – 2020 .....	71
Verdi 18" Main Oversizing FY 2017 .....	72

## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

South Virginia 24" Main (Kumle to Peckham) FY 2019 – 2020 .....	73
NE Sparks Tank Feeder Main Relocation FY 2017 .....	74
Spanish Springs – Spring Creek South Zone Conversion FY 2017 .....	75
West Hidden Valley, Surge St., Piping Rock Main Replacements FY 2017 – 2020 .....	76
Spanish Springs Main Replacement FY 2018 .....	77
Bonnie Ln., Snow Flower, Main Extensions FY 2019 – 2020 .....	78
South Truckee Meadows Capacity Improvements FY 2019 .....	79
STMGID Conjunctive Use Facilities FY 2017 – 2018 .....	80
Arrowcreek-Mt. Rose Conjunctive Use Phase 2 FY 2017 .....	81
Arc Flash Improvements FY 2017 – 2018 .....	82
General Waterline Extensions FY 2017 – 2021 .....	83
Galvanized/Poly Service Line Replacements FY 2017 – 2021 .....	84
POTABLE WATER STORAGE IMPROVEMENTS Summary .....	85
Peavine Tank Replacement FY 2017 - 2018 .....	87
Sun Valley #2 Tank FY 2019 .....	88
Rattlesnake Ring Addition FY 2019 .....	89
Zone 11 Tank FY 2018 .....	90
Fish Springs Ranch #2 FY 2021 .....	91
Former STMGID Tank Recoats FY 2017 – 2021 .....	92
Storage Tank Recoats; Access; Drainage Improvements FY 2017 – 2021 .....	93
HYDROELECTRIC IMPROVEMENTS Summary .....	94
Flume, Forebay, Diversion, and Canal Improvements FY 2017 – 2021 .....	96
Hydro Plant Generator Rewinds FY 2019 – 2021 .....	97
CUSTOMER SERVICE OUTLAYS Summary .....	98
Meter Reading Equipment FY 2017 – 2021 .....	100
New Business Meters FY 2017 – 2021 .....	101
Mueller Pit Replacements Former Washoe County FY 2017 – 2021 .....	102
Mueller Pit Replacements Former STMGID FY 2017 – 2021 .....	103
Meter – ERT-RTR Replacements FY 2017 – 2021 .....	104
ADMINISTRATIVE OUTLAYS Summary .....	105
GIS System Mapping Equipment FY 2017 – 2021 .....	106
Desktop Computer Upgrades FY 2017 – 2021 .....	107

Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

Server/Storage/Operating System Software Upgrades FY 2017 – 2021..... 108

Network Security Upgrades FY 2017 – 2021 ..... 109

Application Software Acquisitions FY 2017 – 2021 ..... 110

Furniture – Office Equipment FY 2017 – 2021 ..... 111

Dump Trucks/Vac Trucks/Backhoe Replacements FY 2017 – 2021..... 112

Crew Trucks/Vehicles FY 2017 – 2021 ..... 113

Security-ER Projects FY 2017 – 2021 ..... 114

Emergency Operations Annex-Design FY 2017..... 115

Corporate Office Expansion-Design FY 2017 – 2021 ..... 116

## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

## INTRODUCTION

The Truckee Meadows Water Authority's (TMWA's) Five-Year Capital Improvement Plan 2017 – 2021 (CIP), describes all infrastructure construction and major capital outlays that will take place between July 1, 2016 and June 30, 2021. Guidance for identifying and scheduling projects in the 2017-2021 CIP is provided by TMWA's 2010-2030 Water Facility Plan (WFP) and the 2016-2035 Water Resource Plan (WRP). Both these Plans are formally updated in calendar year 2016 from a consolidated utility perspective and will be the cornerstone of future CIPs. In addition to the WFP and WRP, TMWA incorporated capital project schedules for the consolidated utilities the Washoe County Water Utility (WCWU) and the South Truckee Meadows General Improvement District (STMGID). These former utilities capital improvement plans are also based on various WCWU and STMGID facility plans and construction/capital outlay analyses.

On January 1, 2015, TMWA, the WCWU and STMGID consolidated to create a regional water system under TMWA. The 2017-2021 CIP incorporates a comprehensive compilation of water system improvements for TMWA and the former WCWU and STMGID water systems. A major feature of the 2017-2021 CIP is the construction of a number of projects that will expand the conjunctive use of the region's water resources. The philosophy behind conjunctive use of local water resources is to maximize the use of surface water while preserving the integrity of groundwater resources which are preserved and can be drawn upon during periods of persistently dry weather. Another aspect of the 2017-2021 CIP is to expand the Aquifer Storage and Recovery Program (ASR Program) which is the recharge of groundwater basins with treated surface water. This activity is normally performed during the winter months when there is excess surface water treatment capacity.

The 2017-2021 CIP constitutes an essential component in TMWA's system of planning, monitoring and managing the activities of purveying water and generating hydroelectric power. This introduction will summarize projects and capital outlays for the ensuing five years including the explanation of prioritization of projects, and methodology for assigning the cost of projects to existing customers, development, also referred to as new and expanded service, or drawing on cash reserves transferred from WCWU and STMGID. A condition of consolidating STMGID into TMWA was that the former STMGID treasury be used only for infrastructure improvements in the former STMGID service area. The current 2017-2021 CIP is incorporated into a broader, constantly-updated Five-Year Funding Plan (FP) for a comparable period. This Funding Plan (FP) will determine adequate levels and sources of funding for projects contained in the 2017-2021-Year CIP.

The 2017-2021 FP indicates that TMWA can fund the CIP in light of diminished water sales. This situation is the result of significant reductions in water demands resulting from the drought. Otherwise there appears to be adequate treasury and revenues from various sources to fund operations, pay principal and interest on existing debt, principal and interest on future financing activities, and capital improvements as presented in the 2017-2021 CIP.

## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

The 2017-2021 CIP envisions a total of \$153.4 million of spending with approximately 84.6% or \$129.8 million of this total amount dedicated to upgrades or replacement of existing infrastructure, and approximately 15.4% or \$23.6 million allocated to construction of new water system capacity projects, conjunctive use construction projects, retrofit of remaining unmetered services, and potential opportunistic acquisition of water rights. Construction/capital outlays associated with the former STMGID service area are estimated to be approximately 9.0% or \$13.9 million of total spending over the fiscal year 2017-2021 periods. There are sufficient STMGID transferred reserves to fund the next five years of capital improvements in this category. Of the total projected spending over the next five years \$10.4 million is considered contingency spending which is dependent on certain events occurring to trigger spending. The \$153.4 million in projected spending is categorized in nine broad categories of improvements and spending outlays. These nine categories are:

1. Raw Water Supply Improvements
2. Groundwater Supply Development
3. Treatment Plant Water Quality (WQ) Improvements
4. Distribution System Improvements
  - a. Pressure Improvements
  - b. Water Main Distribution Service Line Improvements
5. Potable Water Storage Improvements
6. Hydroelectric Improvements
7. Customer Service Outlays
8. Administrative Outlays
9. Special Projects Funded by Development

The ninth category Special Programs Funded by Development programs are separated from a presentation standpoint because in the case of water right acquisitions spending is currently driven by pricing opportunity and is part of the contingency spending. The completion of the water meter retrofit project may occur during the current five year planning horizon since TMWA is seeing increasing contributions from developers to fund the few remaining meter installations. TMWA is seeking matching grant funding to combine with existing water meter retrofit cash reserves which together should be sufficient to complete the program.

A broad description of each category is provided next with detailed project descriptions to be found in the Project Description Section of the 2017-2021 CIP.

The first category, *Raw Water Supply Improvements*, contains 2.3% or approximately \$3.5 million of total spending in the 2017-2021 CIP. Projects focus on improvements to the Highland Canal/Siphon raw water conveyance infrastructure, upstream storage improvements for Donner and Independence Lakes where TMWA stores its Privately-Owned Stored Water (POSW) and expenses associated with the implementation of the Truckee River Operating Agreement (TROA). Implementation of TROA is invaluable to TMWA since it now allows for the modification of river operations to expand upstream storage in the federal reservoir system for increased drought storage. TROA was implemented on December 1, 2015. TMWA is now storing water in the federal reservoir system under this new river operating regime.

## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

The second category, *Ground Water Supply Improvements*, contains 8.8% or approximately \$13.5 million of total spending in the 2017-2021 CIP. These projects focus on preserving existing well capacities, drilling and equipping of new wells and at times complete replacement of existing wells.

The third category, *Treatment Plant Improvements*, contains 14.7% or approximately \$22.6 million of total spending in the 2017-2021 CIP. This spending targets fix and finish projects with the primary focus on the Chalk Bluff and Glendale Surface Water Treatment Plants located on the Truckee River. Another significant planned investment is the Mt. Rose Surface Water Treatment Plant which will provide additional critical water supplies on the Mt. Rose/Galena Fan with water sourced from local creeks. Other improvements focus on satellite water system treatment upgrades and a complete upgrade of the Supervisory Control and Data Acquisition (SCADA) system which provides centralized automated system control and data storage for the distribution system.

The fourth category, *Distribution System Improvements*, contains 49.2% or approximately \$75.5 million of total spending and is the most significant spending category in the 2017-2021 CIP. This spending is bifurcated into pressure improvements and water main and service line improvements. Pressure improvements include pump station rebuilds and new construction, correction of pressure or fire flow deficiencies, pressure regulating station rebuilds and new construction, as well as reconstruction of pressure regulating valves. Water main improvements include replacement of aged water mains reaching end of service life, installation of new mains for new and expanded service, water main oversizing and extensions, and the remaining two of three major conjunctive use projects to extend surface water supplies to the areas that rely heavily on year round groundwater pumping. The last set of projects furthers the conjunctive use philosophy of water resource management.

The fifth category, *Potable Water Storage Improvements*, contains 8.5% or approximately \$13.0 million of total spending in the 2017-2021 CIP. These projects are comprised mainly of new treated water tank construction to serve new and expanded service, some replacement of existing treated water tank capacity as well as systematic recoating of treated water tank interiors and exteriors to extend service life of these facilities.

The sixth category, *Hydroelectric Improvements*, contains 4.1% or approximately \$6.3 million of total spending in the 2017-2021 CIP. These improvements center on the three run-of-river hydroelectric facilities currently owned by TMWA. Efforts on these facilities focus primarily on flume, forebay, diversion and canal improvements as well as equipment upgrades.

The seventh category, *Customer Service Outlays*, contains 5.8% or approximately \$8.9 million of total spending in the 2017-2021 CIP. Spending in this category focuses on meter reading device replacements and meter replacement if required. This spending is on an as needed basis. Also in this category is a spending provision for new business meters which is funded by development. Also as meter pit failures occur in the former merged water system service areas those meter pits are converted to TMWA material standards.

## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

The eighth category, *Administrative Outlays*, contains 5.2% or approximately \$7.9 million of total spending in the 2017-2021 CIP. These outlays are primarily for Information Technology equipment, licenses, and desktop computer replacements as required. Included in this category of spending are fleet upgrades for heavy and light vehicles as well as excavation equipment.

The ninth category, *Special Projects Funded by Development*, contains 1.5% or approximately \$2.3 million of total spending in the 2017-2021 CIP. These outlays are for water meter retrofit and opportunistic water right purchases.

## DEFINITIONS

### Capital Improvement Program Definitions

The Five-Year CIP is a planning and budgeting tool, which provides information about TMWA's infrastructure needs for a five-year time frame. Each year, the list of projects is reviewed for cost and priority. New projects may be added and other projects delayed or deleted entirely. Since most projects are mandatory or necessary, deletion of a project would be rare with the exception of contingency spending. However, capital spending plans must remain flexible, and it is often necessary to take revisions to the approved fiscal year's CIP back to the TMWA Board for approval. If construction or outlays can be deferred, TMWA will defer spending in order to preserve cash reserves, regardless whether or not there are difficult economic times. These decisions are made on a case by case basis.

Generally, capital improvements/outlays are defined as physical assets, constructed or purchased, that have a useful life of one year or longer and a cost of \$5,000 or more.

### Definition of Capital Outlays

"Capital Outlays," which are in TMWA's capital budget, include such things as furniture, computer equipment and software, vehicles, and heavy equipment needed to support TMWA's operations. These items are generally found in the Administrative category of projects. For Customer Service category these outlays involve meter installations, and acquiring meter reading equipment.

## PRIORITIZATION OF PROJECTS/OUTLAYS

TMWA may not have sufficient funding to meet all its capital needs each year or may divert funding to meet unexpected capital improvements. If such conditions arise, projects are prioritized based on the effect each project has on TMWA's ability to meet customer demand and maintain water system reliability. TMWA's updated Five-Year FP is used to analyze overall total spending, identify various funding alternatives, and help determine whether or not water rate adjustments will be required.

The priority categories represent a relative degree of need for any particular project and are described below.

- \* **PRIORITY 1 MANDATORY:** These are considered absolutely required, and are the highest priority of all capital projects. Mandatory projects include those in final design or already under construction, or those required by legislation, or regulation for protection of public health and safety. These projects are generally found in the first fiscal year of the 2017-2021 CIP. Water demands or infrastructure conditions are such that if the project is not completed TMWA runs the risk of eventually being unable to reliably provide water service to its existing customers and/or new and expanded service, or incur extended outages.
- \* **PRIORITY 2 NECESSARY:** A project that is important for providing water service to customers, yet timing of construction or spending outlay is not as critical as a mandatory project. These projects are required and are generally found in the last four years of the 2017-2021 CIP. External factors such as the pace of new development or the condition of existing infrastructure may delay or accelerate the timing of project construction. When return on investment is a determining factor, projects in this category must have a payback of less than five years. A rate of return may not be applicable to projects whose economic/financial benefits cannot be easily quantified.
- \* **PRIORITY 3 CONTINGENCY:** These projects or capital outlays are not immediately critical to the operation of the water system. Expenditures in this category generally require a business case study or specific criteria to be met before spending can occur. If such criteria are not met, then spending may or may not be justified. Also, some projects are deferrable if spending is required in an area of higher priority. Even though these projects and outlays are in the 2017-2021 CIP the likelihood spending will occur may be remote and is based upon future conditions that are difficult to predict.

## **FUNDING OF CAPITAL SPENDING**

### **Funding Sources**

The 2017-2021 CIP will rely on various funding sources to pay for capital projects/capital outlays. TMWA relies heavily on revenues generated from water sales, hydroelectric, and other operating sales to fund the majority of projects. Developer contributions have historically been an important funding source for certain construction projects for new and expanded water system capacity. Investment income is also available to augment other revenue sources but is minor in relation to other funding sources. Collection of developer fees have been at historical lows since the inception of TMWA. TMWA has not been reliant on these fees to fund operations or fund annual principal and interest payments on TMWA's outstanding debt. In fiscal year 2016 residential, and to some extent commercial development activity, has accelerated in a meaningful manner providing financial resources to fund projects listed in the 2017-2021 CIP for new and expanded service. TMWA may rely on the issuance of new money debt to fund large levels of capital spending in a particular period. The 2017-2021 CIP does not anticipate reliance on funding from new money at this time. TMWA has relied on a number of new money debt issuances in the past to fund capital spending.

### **Developer Contributions**

TMWA looks to the development community for developer contributions in the form of system development charges or direct reimbursements to fund capital expenditures related to new or expanded water service, including pump station construction or expansions and feeder main extension projects. In June 2003, the TMWA Board adopted facility charges to pay for new treatment/supply capacity projects and new storage capacity projects. TMWA began collecting these facility charges in January 2004. Under TMWA's Rule 5 these proceeds are used to support new capacity construction. Rule 7 governs the purchase of water rights and reimbursement by developers for issuance of will-serve commitments for water service. However, because of the timing of certain growth driven capital projects, additional financial resources may be called upon as needed. The TMWA Board updated the system development charges in March 2005, in October 2006, in February 2008 (effective March 1, 2008) and finally in July 2013. These fees are subject to periodic review for funding adequacy.

### **Bonds and Other Financing/Funding Tools**

New money revenue bond issuance has been historically an integral part of funding construction spending. TMWA prefers to not use senior lien debt, but rather rely on subordinated debt financing obtained through the Drinking Water State Revolving Loan Fund and the tax-exempt commercial paper program due to lower cost of capital and repayment subordination features of these funding vehicles. Customer water sales and various developer fees may not be immediately sufficient to pay for construction

## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

spending and capital outlays so there may be some reliance on new money debt and reliance on future tax-exempt commercial paper note sales.

At the time of the acquisition of the water assets of Sierra Pacific Resources (SRP), TMWA established a \$40.1 million capital improvement project fund from proceeds of Series 2001-A acquisition bonds issuance. Since inception, TMWA has primarily relied upon operating cash flow, investment income and developer fees to fund capital projects. However, during fiscal year 2005, TMWA was able to utilize a low cost *Drinking Water State Revolving Fund (DWSRF)* loan for \$4.8 million to fund arsenic removal projects and to issue \$40.0 million in additional senior lien bonds to fund various capital improvements. The \$40.0 million Series 2005 Revenue bond proceeds (totaling a net \$37.2 million to apply to construction) were fully expended before the end of fiscal year 2008. TMWA inaugurated a tax-exempt commercial paper program in August 2006; initially to fund water right purchases with two issues that totaled \$43 million. Moreover, the program provides another resource to draw upon for additional funding for capital projects and water rights acquisitions. Market conditions were extremely favorable in February 2008, at which time TMWA took the opportunity to issue an additional \$25 million at an initial rate of 1.59% which includes letter of credit fees and commercial paper remarketing costs. TMWA has taken advantage of 0% interest rate federal stimulus funding and obtained a \$2.3 million loan through the DWSRF program to partially fund the Mogul Bypass Siphon Project. In December 2009 TMWA obtained an \$8.5 million DWSRF loan authorization to construct the Glendale Raw Water Diversion and Intake Structure which was completed in fiscal year 2011. TMWA drew only \$4.4 million on this facility and de-obligated the remaining authorization. TMWA extended its tax-exempt commercial paper program in fiscal year 2012 and completed the process of extending the direct pay liquidity facility with two banks, Wells Fargo N.A and J.P. Morgan N. A. to substitute Lloyds TSB, the originator of the first liquidity facility. Subsequently in fiscal year 2014 TMWA extended the tax-exempt commercial paper program again and replaced Wells Fargo N.A and J.P. Morgan N. A. liquidity facility with an expanded Liquidity facility with Bank of Tokyo-Mitsubishi UFJ. The new liquidity facilities provide for a direct-pay letter of credit to support remarketing of TMWA's commercial paper and also supports an A-1/P-1 rating (highest rating) for TMWA's short term variable rate debt program. This has resulted in favorable interest rates, at times less than 1/10 of 1% which was continually experienced throughout the last two years. In the fourth quarter of fiscal year 2015, TMWA applied for a Drinking Water State Revolving Fund Loan for \$15.0 million to fund the construction phase of the North Valleys Integration Project. Draws on this loan are underway to fund the North Valleys Integration Pipeline Project.

### **Rule 5 and Rule 7 Fees**

These fees are collected from the development community. Rule 5 fees are paid by developers to TMWA for the construction of new water feeder mains, new treatment/supply capacity, new storage capacity, and for new or rebuilt pump stations to meet demand resulting from new and expanded service. Rule 7 Fees are derived from will-serve sales to development. TMWA historically purchased water rights on the open

## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

market and reserves these rights for will-serve letters to be sold to development. TMWA also recovers a modest amount of administrative and financing costs with the sale of each will-serve. The title to water rights are retained by and dedicated to TMWA. TMWA has sufficient inventory of water rights to meet the demands for new and expanded service for the foreseeable future.

**Water Meter Retrofit Fees**

TMWA has been retrofitting flat rate water services with meter boxes, setters and meters. The intent is to meter the entire water system which is now in the final stage. To accomplish this task TMWA collects \$1,830 for each surface acre-foot of demand when will-serve commitments are issued for new or expanded service. Proceeds from the \$1,830 per surface acre-foot fee are used to fund the water meter retrofit project. TMWA expects to complete the water meter retrofit program over the course of the next several years

**Capital Contributions from Other Governments**

TMWA is a water wholesaler to the Sun Valley General Improvement District (SVGID). From time to time, new infrastructure must be constructed to service this retail water-service provider. There are no expectations of any need for reimbursement from this source in the 2017-2021 CIP although historically SVGID has made contributions to TMWA.

**Reserves from the Water Utility Consolidation**

TMWA, the WCWU and STMGID consolidated on January 1, 2015. As a result of the consolidation, the respective treasuries of the WCWU and STMGID were transferred to TMWA. The WCWU treasury that was transferred to TMWA amounted to approximately \$43.4 million after the final transfer of funds while the STMGID treasury transferred to TMWA was approximately \$15.7 million. These cash and investment reserves will be used to make necessary improvements in the former water utility service areas including conjunctive use enhancements.

**Other Resources**

One method of generating additional funds for capital improvements is to increase existing fees/charges or to add new fees/charges. However, future increases will be provisional if TMWA is able to meet revenue requirements and maintain bond coverage ratios that will suffice to maintain strong investment-grade credit ratings. TMWA has obtained many benefits of Aa2/AA-/AA- credit ratings with positive/stable outlooks. The Board ultimately decided up through fiscal year 2009 to forego any potential customer rate increases since the last rate increase that occurred in March 2005. The TMWA Board did approve a 4.5% general rate increase for fiscal year 2010 and another 4.4% general rate increase for fiscal year 2011. The TMWA Board has approved and implemented a 3.5% general rate increase that was put into effect February 1, 2012 and another general

## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

3.4% water rate increase in February 2014. As a consequence of the water utility consolidation any review of water rate adjustments was forestalled until TMWA had at least one full year of operating history as a consolidated water utility. Water rate increases are essential for TMWA to maintain sound credit ratings, to insure that the liquidity facility that supports TMWA's commercial paper program can be successfully extended, and to preserve access to other opportunities in the capital markets. TMWA should also fund rehabilitative capital projects in a meaningful manner due to water delivery being an essential municipal service.

## **FISCAL YEAR 2017 CAPITAL SPENDING-THE CAPITAL BUDGET**

TMWA expects to spend \$43.5 million for fiscal year 2017, the first year of the FY 2017-2021 CIP. Of this total 83.5% or \$36.3 million will be focused on water system rehabilitation while 16.5% or \$7.2 million is dedicated to water system expansion, limited opportunistic acquisition of water rights and some water meter retrofit activities. Distribution system improvements are expected to account for approximately 52.9% or \$23.0 million of the total projected spending for fiscal year 2017. The Stead Transmission Main Replacement Project for \$5.0 million is the largest single project in this category. Groundwater supply improvements are expected to account for approximately 12.8% or \$5.6 million of annual spending. Primary focus will be on drilling and/or equipping four wells for \$4.2 million for peaking purposes as well as further drought hardening. Other activities include activities on existing wells and various rehabilitation projects to preserve well capacities. Treatment plant improvements are expected to account for approximately 16.3% or \$7.1 million of total projected annual spending. Water treatment plant rehabilitation and system control upgrades are expected to be \$3.6 million with design of a new surface water treatment plant on the Mt. Rose Fan for \$2.5 million. System controls and associated telemetry transport is reaching its technological service life and upgrades will be necessary to stay current but not to the extent of being cutting edge technology. All other capital spending and outlays are expected to be 2.3% or \$1.0 million among a number of various smaller projects to improve water quality. Residential-housing growth and commercial-construction activity, which slowed in late fiscal year 2007, declined to a virtual standstill in fiscal years 2009 through 2013. Some residential and commercial construction activity revived in fiscal year 2014 and to a greater extent in fiscal year 2015. Based on current new business applications growth appears to be accelerating in fiscal year 2016 which is now driving more attention to projects for new and expanded service.

In fiscal year 2010, TMWA began capitalizing expenditures for the implementation of TROA. TROA activities address the agreement's provisions directly related to the successful expansion of upstream storage in federal reservoirs. TMWA anticipates spending of approximately \$0.2-0.3 million per year for the next several years. TMWA was awarded \$2.0 million in federal grant funding for this effort of which approximately \$0.9 million remains available for this future spending.

## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

**SUMMARY OF PROJECTS FOR THE FISCAL YEAR 2017 BUDGET**

Total construction spending, acquisition spending, and capital outlays are expected to be \$43.5 million for the fiscal year 2017. TMWA has established the following projects for the capital budget in fiscal year 2017:

**Category 1 Raw Water Supply Improvements \$800,000:**

- Highland Canal Upgrades – Downstream of CB – \$225,000
- Highland Canal Upgrades – Diversion to CB – \$225,000
- Donner Dam Improvements – \$150,000
- Indirect Potable Reuse – \$50,000
- TROA Implementation – \$150,000

**Category 2 Groundwater-Development \$5,585,000:**

- Well Rehabilitation and Improvements – \$925,000
- Well Bypass and Chlorine Room Improvements– \$110,000
- Double Diamond Well #3 Equip – \$1,000,000
- Air Guard Well Replacement Equip – \$900,000
- Sunrise #3 Replacement (drilling) – \$750,000
- Bedell Flat Water Bank – \$50,000
- STMGID Well #1 Replacement (drilling) – \$1,500,000
- Well Fix & Finish – \$350,000

**Category 3 Treatment-Improvements \$7,080,000:**

- Treatment Plants – General Fix & Finish – \$2,210,000
- Eagle Canyon Transmission Main Phase 2 – \$100,000
- Truckee Canyon Water Treatment Improvements – \$400,000
- Lightning W Treatment Improvements – \$500,000
- SCADA Rehab/Plant Operating Software – \$1,370,000
- Mt. Rose Surface Water Treatment Plant – \$2,500,000

**Category 4 Distribution-Improvements \$22,615,000:****Category 4a Pressure Improvements Subtotal \$4,540,000**

- Pressure Regulator Rehabilitation – \$650,000
- Pressure Reducing Valve (Roll Seal) Removal & Replacement– \$400,000
- Land Acquisitions – \$500,000
- Pump Station Oversizing – \$100,000
- Pump Station Rehabilitation – \$1,800,000
- D'Andrea #3 Pump Station (developer reimbursement) – \$100,000
- NAC Deficiencies Saddlehorn, Upper Toll Rd. – \$340,000
- Standby Generators – \$650,000

**Category 4b Water Main Distribution Service Line Improvements Subtotal \$18,075,000**

- Street & Highway Main Replacements – \$6,200,000
- Stead Main Replacement Project Phase 2 – \$5,000,000

## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

- Hidden Valley Intertie Pumping Capacity – \$ 500,000
- California-Marsh 24" Main Replacement – \$100,000
- Verdi 18" Main Oversizing – \$ 375,000
- NE Sparks Feeder Main Relocation – \$900,000
- Spanish Springs-SC South Zone Conversion – \$ 700,000
- West Hidden Valley, Surge St., Piping Rock Main Replacements – \$1,000,000
- STMGID (former) Conjunctive Use Facilities – \$1,500,000
- Arrowcreek-Mt Rose Conjunctive Use Phase 2 – \$1,200,000
- Arc Flash Improvements – \$ 100,000
- General Waterline Extensions – \$ 100,000
- Galvanized./Polybutylene Service Replacements – \$ 400,000

**Category 5 Storage–Improvements \$1,050,000:**

- Peavine Tank Replacement – \$ 100,000
- Former STMGID Tank Recoats – \$170,000
- Storage Tank Recoats, Access & Drainage Improvements– \$780,000

**Category 6 Hydroelectric – Improvements \$ 2,075,000:**

- Flume, Forebay, Diversion and Canal Improvements – \$2,075,000

**Category 7 Customer Service \$1,800,000:**

- New Business Meters – \$350,000
- Mueller Pit Replacements (former Washoe County service area) – \$125,000
- Mueller Pit Replacements (former STMGID service area) – \$75,000
- Meter ERT-RTR Replacements – \$1,250,000

**Category 8 Administrative \$2,030,000**

- GIS System Mapping Equipment - \$40,000
- Desktop Computers New & Refresh – \$100,000
- Server / Storage / Operating System Software Upgrades – \$275,000
- Network Security Upgrades – \$150,000
- Application Software Acquisitions– \$150,000
- Furniture – \$50,000
- Dump Trucks/Vac Trucks/Backhoe Replacements– \$125,000
- Crew Trucks-Vehicles – \$690,000
- Security-Emergency Response (ER) Equipment – \$150,000
- Emergency Operations Annex (Design) – \$150,000
- Corporate Office Expansion (Design) – \$150,000

**Category 9 Special Projects Funded by Development \$450,000:**

- Water Meter Retrofit – \$300,000
- Water Right Purchases – \$150,000

Detailed project descriptions are provided for all projects in the 2017-2021 CIP. These descriptions cover the fiscal year 2017 capital budget as well as the four additional years from 2018-2021.


## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

**CAPITAL EXPENDITURES BY FUNCTION**  
**(Amounts in thousands of dollars)**

<b>Summary of Capital Expenditures by Function</b>	<b>FY 2017</b>	<b>FY 2018</b>	<b>FY 2019</b>	<b>FY 2020</b>	<b>FY 2021</b>	<b>Five Year CIP Total</b>
Raw Water Supply Improvements	800	475	500	400	1,300	3,475
Ground Water Supply Improvements	5,585	1,585	1,515	2,410	2,435	13,530
Treatment Plant Improvements	7,080	9,905	2,467	1,608	1,510	22,570
Distribution System Improvements	22,615	14,490	11,000	17,400	9,950	75,455
Potable Water Storage Improvements	1,050	6,360	3,570	800	1,200	12,980
Hydroelectric Improvements	2,075	845	1,105	1,150	1,150	6,325
Customer Service Outlays	1,800	1,860	1,800	1,935	1,550	8,945
Administrative Outlays	2,030	1,638	1,385	1,399	1,467	7,919
<b>Sub-Total TMWA Construction Spending &amp; Outlays</b>	<b>43,035</b>	<b>37,158</b>	<b>23,342</b>	<b>27,102</b>	<b>20,562</b>	<b>151,199</b>
Water Meter Retrofit/ Water Right Purchases	450	450	450	450	450	2,250
<b>Total Projected Capital Spending</b>	<b>\$43,485</b>	<b>\$37,608</b>	<b>\$23,792</b>	<b>\$27,552</b>	<b>\$21,012</b>	<b>\$153,449</b>

**PRELIMINARY FUNDING PLAN  
FUNDING SOURCES  
(Amounts in thousands of dollars)**

<b>Summary of Funding Sources</b>	<b>FY 2017</b>	<b>FY 2018</b>	<b>FY 2019</b>	<b>FY 2020</b>	<b>FY 2021</b>	<b>Five Year CIP Total</b>
Capital Improvements Funded by Customer Rates	\$32,423	\$25,668	\$19,570	\$21,122	\$17,207	\$115,989
Capital Improvements Funded by Development	6,575	5,645	3,068	3,295	2,420	21,003
Capital Improvements Funded by Grants	150	100	100	-	-	350
Capital Improvements Funded with former STMGID Reserve Funds	3,887	5,745	605	2,685	935	13,857
Water Meter Retrofit/ Water Right Purchases	450	450	450	450	450	2,250
<b>Total Projected Capital Spending</b>	<b>\$43,485</b>	<b>\$37,608</b>	<b>\$23,792</b>	<b>\$27,552</b>	<b>\$21,012</b>	<b>\$153,449</b>

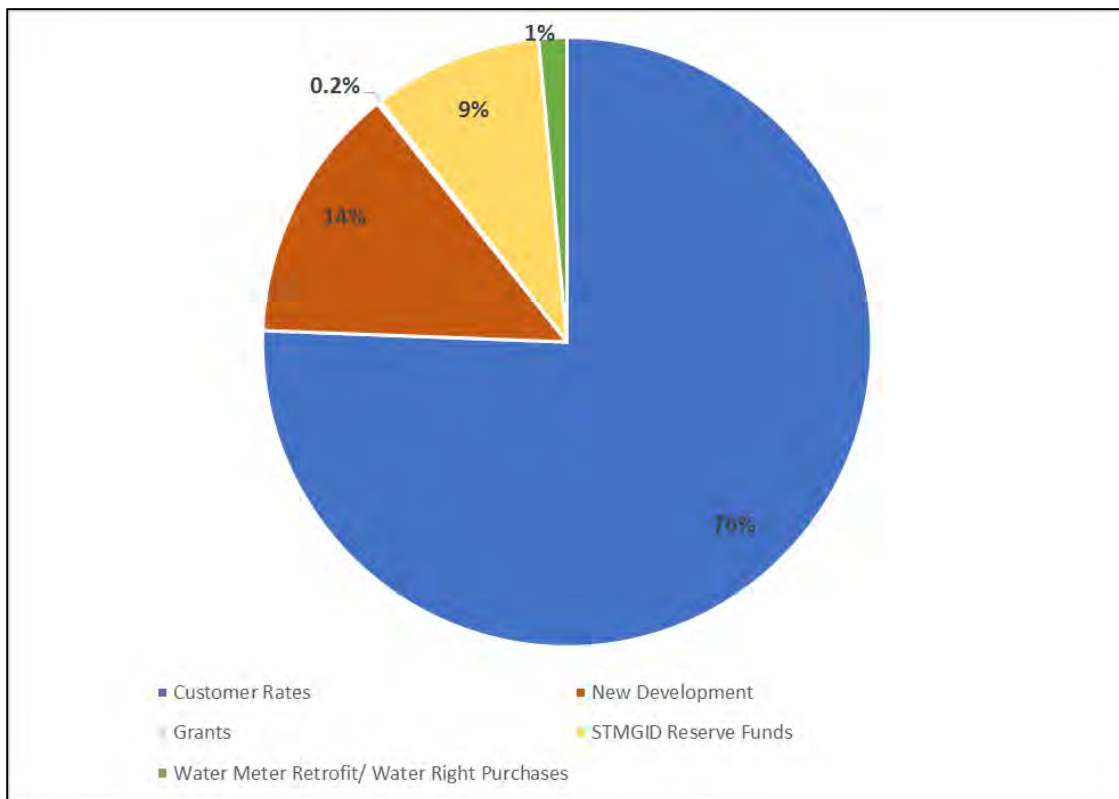

## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

**FUNDING BY PRIORITY**  
**(Amounts in thousands of dollars)**

<b>Summary of Funding by Priority</b>	<b>FY 2017</b>	<b>FY 2018</b>	<b>FY 2019</b>	<b>FY 2020</b>	<b>FY 2021</b>	<b>Five Year CIP Total</b>
Priority 1 – Mandatory Spending, Projects in Progress, Regulatory	31,975	26,448	14,717	15,932	14,742	103,814
Priority 2 – Necessary Spending	9,010	10,600	7,505	7,885	4,270	39,270
Priority 3 – Contingency Spending	2,500	560	1,570	3,735	2,000	10,365
<b>Total Projected Capital Spending</b>	<b>\$43,485</b>	<b>\$37,608</b>	<b>\$23,792</b>	<b>\$27,552</b>	<b>\$21,012</b>	<b>\$153,449</b>


## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

**PROJECT FUNCTIONS AND DESCRIPTIONS****RAW WATER SUPPLY IMPROVEMENTS****Summary**

<b>Priority</b>	<b>Funding Source</b>	<b>Description</b>	<b>FY17</b>	<b>FY18</b>	<b>FY19</b>	<b>FY20</b>	<b>FY21</b>	<b>CIP Total</b>
<b>1</b>	Customer Rates	Highland Canal-Upgrades-Downstream	225	225	225	225	225	1,125
<b>1</b>	Customer Rates	Highland Canal-Upgrades-Diversion to Chalk Bluff	225	100	100	100	1,000	1,525
<b>1</b>	Customer Rates	Donner Dam Improvements	150	-	-	-	-	150
<b>2</b>	Customer Rates	Indirect Potable Reuse	50	50	75	75	75	325
<b>1</b>	Grant	TROA Implementation	150	100	100	-	-	350
<b>Subtotal</b>			<b>800</b>	<b>475</b>	<b>500</b>	<b>400</b>	<b>1,300</b>	<b>3,475</b>

**Project Locations:** Map of all *Raw Water Supply Improvements* projects are highlighted in the following map.

Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

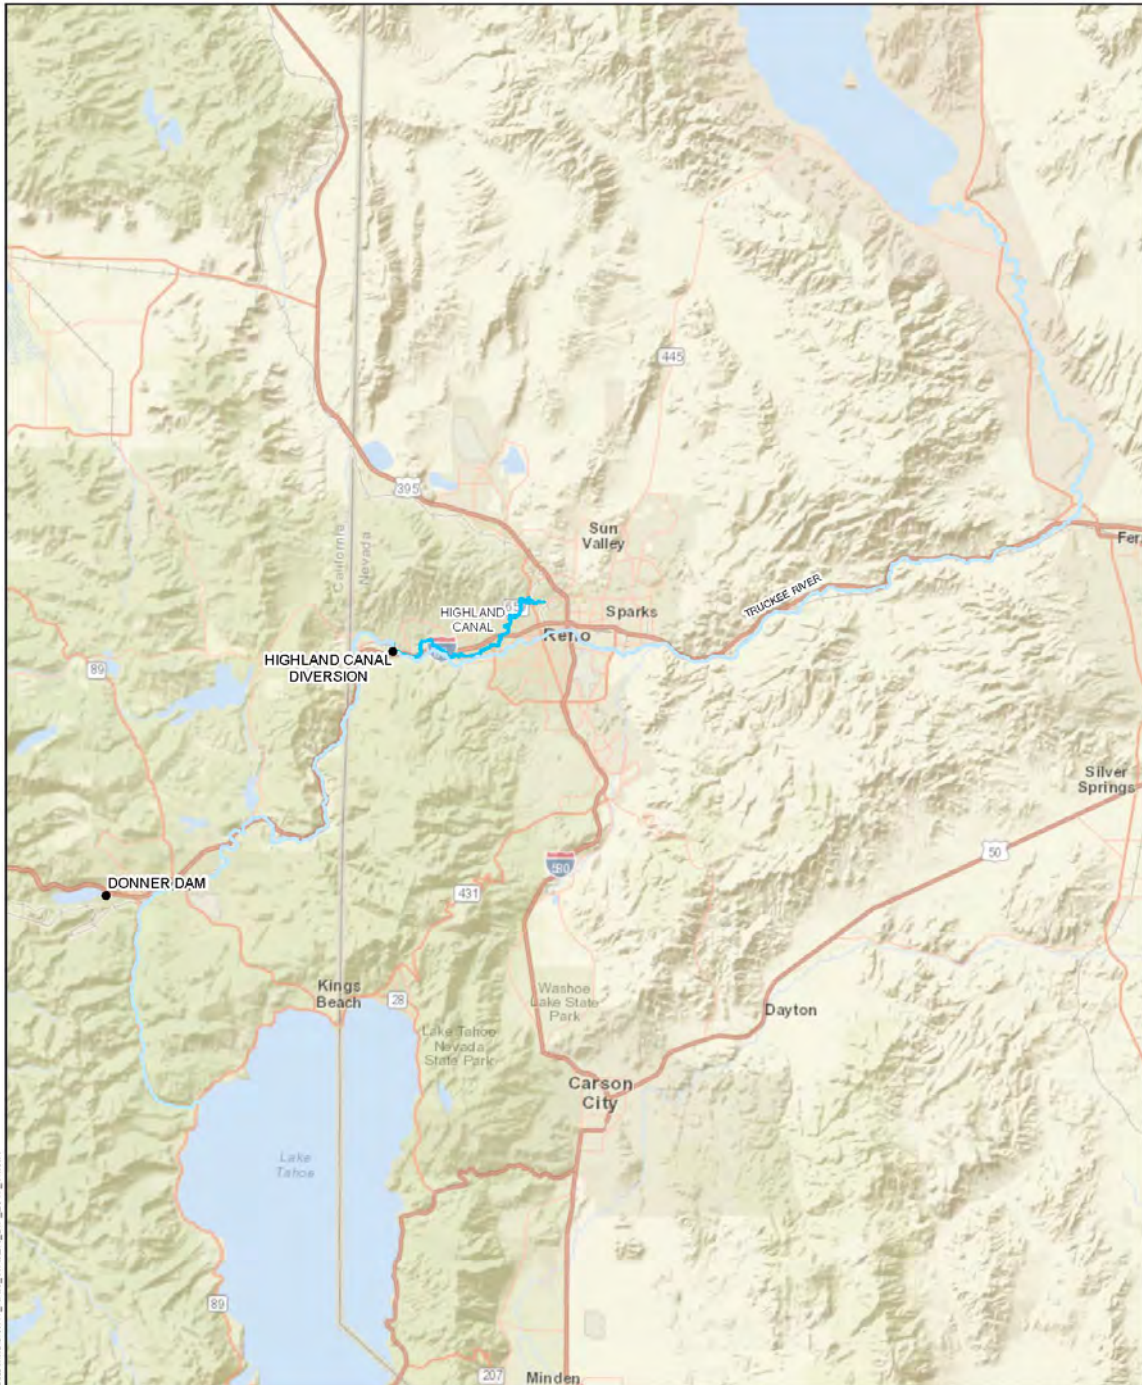

W:\projects\Engineering\CIP\project\trm\6.5x11\_RAW\_WATER\_CIP\_2017\_TMA



**FY 2017-2021 CIP  
RAW WATER SUPPLY IMPROVEMENTS  
SUMMARY**

DATE 5/3/2016

MAP BY: JK

REQUESTED BY: LK

SCALE: 1 in = 8 miles



NAD 83 NEVADA STATE  
PLANE WEST FEET

## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

## Raw Water Supply Improvements

### Highland Canal-Upgrades-Downstream FY 2017 – 2021

**FUNDING TIMELINE:**

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
1	Customer Rates	Highland Canal – Upgrades - Downstream	225	225	225	225	225	1,125

**PROJECT DESCRIPTION:** The improvements that are reflected in this capital project(s) item are for betterments along the canal downstream of the Chalk Bluff Water Treatment Plant to the Rancho San Rafael Park. Approximately 2,000 feet of “smart ditch” (a molded plastic trapezoidal channel section) has been installed downstream of Chalk Bluff in recent years. This product reduces leakage and maintenance and it is planned to continue to extend the installation in the future. Other efforts are rehabilitative in nature and may address access and security concerns.

**SCHEDULE:** Projects are identified and prioritized on an annual basis.

**PROJECT:**

## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

**Raw Water Supply Improvements****Highland Canal – Upgrades – Diversion to Chalk Bluff FY 2017 – 2021****FUNDING TIMELINE:**

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
1	Customer Rates	Highland Canal – Upgrades-Diversion to Chalk Bluff	225	100	100	100	1,000	1,525

**PROJECT DESCRIPTION:** These improvements are for the stretch of canal between the diversion on the Truckee River and Chalk Bluff Water Treatment Plant. The proposed spending is to secure the canal from trespass to enhance public safety and prevent encroachment on TMWA property. Due to swift flows in the Highland Canal TMWA will also complete fencing along the canal for public safety, install security cameras and access barriers. Decision to proceed with the construction of the Mesa Park Drainage Improvements project in FY17 is not finalized in this draft of the CIP. The proposed FY 2021 budget is for replacement of the existing 54” siphon pipe under the Truckee River just downstream of the diversion installed in 1954.

**SCHEDULE:** Projects are identified and prioritized on an annual basis.

**PROJECT:**

## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

## Raw Water Supply Improvements

### Donner Dam Improvements FY 2017

**FUNDING TIMELINE:**

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
1	Customer Rates	Donner Dam Improvements	150	-	-	-	-	150

**PROJECT DESCRIPTION:** During the annual inspection of the Donner Dam facility the Division of Safety of Dams (DSOD) noted areas of the structure that are suffering from deteriorating concrete. TMWA completed repairs to the dam in FY 2016 but still needs to make repairs to the concrete railings and deck.

**SCHEDULE:** Anticipated design and bidding phase to be completed in FY 2017 and construction phase will occur in 2017.

**PROJECT:**

## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

## Raw Water Supply Improvements

### Indirect Potable Reuse FY 2017 – 2021

**FUNDING TIMELINE:**

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
2	Customer Rates	Indirect Potable Reuse	50	50	75	75	75	325

**PROJECT DESCRIPTION:** Presently, the NDEP has established a Reuse Steering Committee which is undertaking a comprehensive review of the effluent reuse program for treated effluent, with a goal of providing strategic direction for future reuse in Nevada. Categories of reuse being evaluated include urban, agricultural (food and non-food crops), impoundments, environmental, industrial, groundwater recharge (non-potable) and indirect potable reuse (IPR). Indirect potable reuse is a process whereby the purified water is stored in an environmental buffer such as a lake or aquifer before re-entering the drinking water supply.

From 2008-2010, the City of Reno conducted a treatment demonstration project at the Reno-Stead Water Reclamation Facility using ozonation (“O3”) and biologically activated carbon (“BAC”). Recently, grant funds for a nation-wide study by the WaterReuse Research Foundation have been secured by a local consulting firm working in collaboration with American Water (the largest investor-owned U.S. water and wastewater utility company) to further the advancement of the O3-BAC technology. Beginning in 2016, a multi-year O3-BAC pilot / demonstration project will be initiated locally at Washoe County’s South TMWRF, with involvement of technical staff from UNR, Reno, Sparks, Washoe County and TMWA. Conceptually, an IPR project might be well suited for areas such as the North Valleys or the South Truckee Meadows. IPR in these locations could improve the utilization of existing water resources and water rights, since the Water Reclamation Facilities for these areas do not return the treated water to the Truckee River. The purified water could be recharged using infiltration basins or injection wells in areas generally isolated from domestic wells, blended with ambient groundwater, and eventually recovered using TMWA’s municipal wells.

**SCHEDULE:** Planning, permitting, design and operation of an O3-BAC pilot / demonstration project over the next 3-5 year time frame, with planned funding support from Reno, Sparks, Washoe County, WRWC and TMWA.

## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

## Raw Water Supply Improvements TROA Implementation FY2017 - 2019

**FUNDING TIMELINE:**

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
1	Grant	TROA Implementation	150	100	100	-	-	350

**PROJECT DESCRIPTION:** The Truckee River Operating Agreement (TROA) became effective and TMWA began implementation officially on December 1, 2015. The construction of additional stream gaging and discharge monitoring stations (particularly in the South Truckee Meadows area) and the rehabilitation of some older existing sites will be necessary. TMWA has in the past obtained and will continue to pursue federal grant funding to offset the costs of these activities.

## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan


## GROUND WATER SUPPLY IMPROVEMENTS

### Summary

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
1	Customer Rates & Reserves	Well Rehabilitation Improvements	925	925	925	925	925	4,625
2	Reserves	Well Bypass and Chlorine Room Improvements (former STMGID)	110	110	110	110	110	550
1	Developer Fees	Double Diamond Well #3 (Equip)	1,000	-	-	-	-	1,000
2	Developer Fees	Double Diamond Well #4 (Equip)	-	-	-	-	1,000	1,000
2	Customer Rates	Campello Capacity Increase	-	150-	-	-	-	150
3	Developer Fees	Callamont Well Equip	-	-	-	1,000	-	1,000
1	Customer Rates	Air Guard Well Equip	900	-	-	-	-	900
2	Customer Rates	Desert Springs Well # 4 Recharge	-	-	130	-	-	130
2	Customer Rates	Sunrise #3 Replacement	750	-	-	-	-	750
3	Customer Rates	Bedell Flat Water Bank	50	50	50	75	100	325
3	Reserves	STMGID Well #1 Replacement	1,500	-	-	-	-	1,500
1	Customer Rates	Well Fix & Finish	350	350	300	300	300	1,600
<b>Subtotal</b>			<b>5,585</b>	<b>1,585</b>	<b>1,515</b>	<b>2,410</b>	<b>2,435</b>	<b>13,530</b>

**Project Locations:** Map of all *Ground Water Supply Improvements* projects are highlighted in the following map.

Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

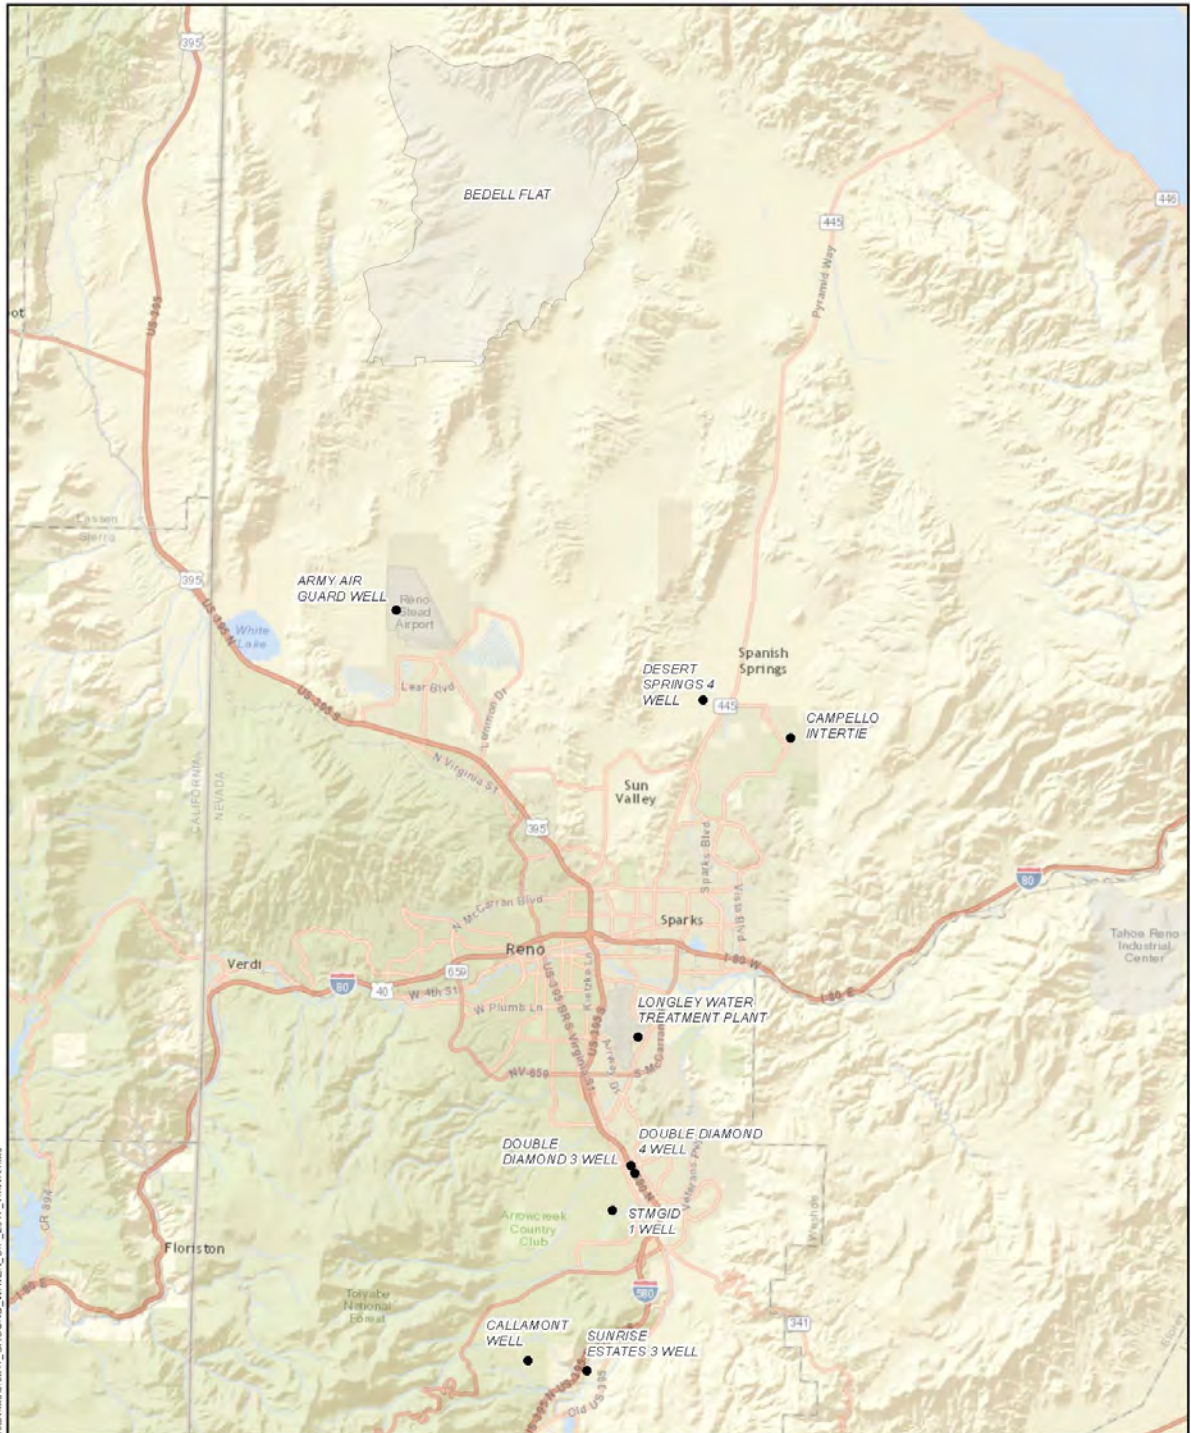

\\p066128\Engineering\CIP\Power\straw618\11\_GROUND\_WATER\_CIP\_2017\_TWWA.mxd



**FY 2017-2021 CIP  
GROUND WATER SUPPLY IMPROVEMENTS  
SUMMARY**

DATE	5/3/2016
MAP BY:	JK
REQUESTED BY:	LK
SCALE:	1 in = 5 miles



## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

## Ground Water Supply Improvements

### Well Rehabilitation Improvements FY 2017 – 2021

**FUNDING TIMELINE:**

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
1	Customer Rates & Reserves	Well Rehabilitation Improvements	925	925	925	925	925	4,625

**PROJECT DESCRIPTION:** Funds are budgeted to rehabilitate TMWA production wells as required. Typically for subgrade rehabilitation efforts, six to eight wells are inspected, tested and evaluated every year to determine if rehabilitation is required. Typical subgrade rehab activities include but are not limited to: pump and pump column pipe replacements; rehabilitation of well casing and screen; and other enhancements to maintain well quality and capacities. Spending in fiscal years 2017-2021 will include improvements at several wells to provide general above grade well equipment and building upgrades including upgrades to electrical and telemetry equipment. TMWA has over 90 water production wells operating throughout the water system. TMWA relies on these wells to provide drought and emergency supply and as a supplemental source to meet peak demands on the water system.

**SCHEDULE:** Wells targeted for rehabilitation improvements in FY 2017: STMGID 1, Arrowcreek 2, Arrowcreek 3, Mt. Rose 3, Mt. Rose 6, Hidden Valley 3, and Old Washoe Estates 3.

**PROJECT:**

## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

**Ground Water Supply Improvements****Well Bypass and Chlorine Room Improvements (former STMGID wells)****FY 2017 - 2021****FUNDING TIMELINE:**

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
2	Reserves	Well Bypass and Chlorine Room Improvements (former STMGID wells)	110	110	110	110	110	550

**PROJECT DESCRIPTION:** During pre-merger facility assessments, it was determined that several former STMGID wells need to be retrofitted with bypass piping and valves to evacuate a certain amount of water prior to discharge to the distribution system. Wells 6 & 12 also require isolation of the chlorine rooms to reduce corrosion issues.

**SCHEDULE:** It is anticipated that all improvements will be completed in the next five years.

**PROJECT:**

## Ground Water Supply Improvements Double Diamond (#3 Equip) FY 2017

**FUNDING TIMELINE:**

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
1	Developer Fees	Double Diamond Well #3 (Equip)	1,000	-	-	-	-	1,000

**PROJECT DESCRIPTION:** Construct pumping facilities for the existing Double Diamond Well #3 including the pump house building, electrical power, pump/motor and valves and piping to provide an additional 1800 gallons per minute of peak period supply to the Double Diamond area.

**SCHEDULE:** The project schedule was originally accelerated in response to needed peaking capacity but acquisition in the southwest portion of the property has delayed construction of the distribution system. The new groundwater supply should be available for the summer of 2017.

**PROJECT:**



## Ground Water Supply Improvements Double Diamond (#4 Equip) FY 2021

### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
2	Developer Fees	Double Diamond Well #4 (Equip)	-	-	-	-	1,000	1,000

**PROJECT DESCRIPTION:** Construct pumping facilities for the existing Double Diamond Well #4 including the pump house building, electrical power, pump/motor and valves and piping to provide an additional 1200 gallons per minute of peak period supply to the Double Diamond area.

**SCHEDULE:** Based on the current growth rate, it is anticipated that the capacity from the new well will be needed in the summer of 2021.

### PROJECT TYPE:



## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

## Ground Water Supply Improvements

### Campello Capacity Increase FY 2018

**FUNDING TIMELINE:**

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
2	Customer Rates	Campello Capacity Increase	-	150	-	-	-	150

**PROJECT DESCRIPTION:** These improvements will increase the transfer capacity between the Spanish Springs #2 pressure zone and the former County Spring Creek system on the east side of Spanish Springs Valley to provide sufficient surface water supply for passive and/or active recharge of former County wells.

**SCHEDULE:** The improvements are currently planned to be completed in FY 2018.

## Ground Water Supply Improvements Callamont Well Equip FY 2020

### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
3	Developer Fees	Callamont Well Equip	-	-	-	1,000	-	1,000

**PROJECT DESCRIPTION:** Construct pumping facilities for one of the existing Callamont wells in the Mt. Rose system including the pump house building, electrical power, pump/motor and valves and piping to provide an additional 500 gallons per minute of peak period supply to the area.

**SCHEDULE:** This project is currently scheduled for construction in FY 2020, but may be constructed sooner depending on the actual schedule for the proposed 210 unit Callamont residential development.

### PROJECT:



## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

## Ground Water Supply Improvements

### Air Guard Well Replacement FY 2017

**FUNDING TIMELINE:**

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
1	Customer Rates	Air Guard Well Equip	900	-	-	-	-	900

**PROJECT DESCRIPTION:** Equipping and engineering of the Air Guard Well in Stead was necessary to reduce sanding and provide additional capacity to the Stead system. The new/replacement well was drilled and constructed in FY 2016. Test pumping indicates the new well will have a capacity of about 2,500 gallons per minute which is twice the capacity of the old well. The budget for FY 2017 is for constructing the pumping facilities including the well building, pump and motor, valves and piping, electrical and controls, etc.

**SCHEDULE:** Successful bids occurred in 2016. The pumping facilities will be constructed in FY 2017.

**PROJECT:**

## Ground Water Supply Improvements Desert Springs Well #4 Recharge FY 2019

### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
2	Customer Rates	Desert Springs Well # 4 Recharge	-	-	130	-	-	130

**PROJECT DESCRIPTION:** This project involves development of an ASR program for Desert Springs Well #4. A blending water main from the well to the 20-inch blending transmission main in Pyramid Highway will be constructed, which will also allow for the injection of surface water from the distribution system in the off-peak season. Other improvements include the construction of two new monitoring wells in the vicinity and equipment to sample and test the water and analyze the results. It is anticipated that some hydrologic modeling and analysis will also be included in the project.

**SCHEDULE:** The improvements are currently scheduled for completion in FY 2019.

### PROJECT:



## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

## Ground Water Supply Improvements

### Sunrise #3 Replacement FY 2017

**FUNDING TIMELINE:**

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
2	Customer Rates	Sunrise #3 Replacement	750	-	-	-	-	750

**PROJECT DESCRIPTION:** This project involves complete replacement of the existing Sunrise Well #3. The existing well is operated on an emergency basis only because it produces excessive sand and is located too close to an existing septic system. This project requires exploration drilling before the final site selection and well construction.

**SCHEDULE:** The project is scheduled for completion in FY 2017 if a suitable site can be acquired.

**PROJECT:**

## Ground Water Supply Improvements Bedell Flat Water Bank FY 2017 – FY 2021

### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
3	Customer Rates	Bedell Flat Water Bank	50	50	50	75	100	325

**PROJECT DESCRIPTION:** As part of TMWA’s overall water resource conjunctive use management strategy, TMWA is working with cost sharing partners including the City of Reno, Sparks and Washoe County to evaluate of the feasibility of an integrated water resource ASR program in Bedell Flat. Bedell Flat is located in southern Washoe County, about 13 miles north of Stead and appears to have favorable hydrogeologic characteristics for a large scale ASR program. Several water resource options are under consideration, including: injection of potable water using ASR wells off of the existing NVIP pipeline; infiltration of highly treated wastewater along a natural drainage referred to as Bird Spring Wash; infiltration of highly treated wastewater through a spreading basin; or a combination of these. Water stored or banked in Bedell Flat could serve as a future non-Truckee River based drought or emergency water supply for the region.

**SCHEDULE:** Geologic/hydrogeologic feasibility investigations and environmental clearance and permitting work are proposed over the next 3-5 years to gain an understanding of the feasibility, scope and cost of a water banking program in Bedell Flat.

### PROJECT:



## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

## Ground Water Supply Improvements

### STMGID Well #1 Replacement FY 2017

**FUNDING TIMELINE:**

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
3	Reserves	STMGID Well #1 Replacement	1,500	-	-	-	-	1,500

**PROJECT DESCRIPTION:** The exiting STMGID #1 Well has been in service since 1984, making it the oldest well in the STMGID system. The exiting well casing and screens show signs of significant corrosion. With the potential for a well casing failure, TMWA intends to drill and equip a replacement well on the exiting well property. The replacement well is expected to have similar construction and capacity as STMGID 1.

**SCHEDULE:** The project schedule will be accelerated if rehabilitation activities determine that STMGID 1 is inadequate. Well rehabilitation is scheduled to conclude in the fall of FY17.

**PROJECT:**

FOU



## Ground Water Supply Improvements

### Well Fix & Finish FY 2017 – 2021

#### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
1	Customer Rates	Well Fix & Finish	350	350	300	300	300	1,600

**PROJECT DESCRIPTION:** Equipment improvements are expected to bring existing wells up to modern standards, including antiquated equipment replacements and improvements for water quality purposes. This project includes improvements to sodium hypochlorite rooms, pump to waste lines and drainage improvements. It also includes well retrofit for recharge where needed.

**SCHEDULE:** Improvements are planned to continue for the duration of this CIP funding plan.

#### PROJECT:



*Well Entrance*



*Well Drainage*



## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan


## TREATMENT PLANT IMPROVEMENTS

### Summary

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
2	Customer Rates	Treatment Plants- General Fix & Finish	2,210	1,500	1,125	840	900	6,575
2	Customer Rates	Eagle Canyon Transmission Main Phase 2	100	1,800	-	-	-	1,900
2	Developer Fees	Truckee Canyon Water Treatment Improvements	400	35	60	60	60	615
2	Developer Fees	Lightning W Treatment Improvements	500	60	60	160	60	840
1	Customer Rates	SCADA Rehab/Plant Operating Software	1,370	1,410	1,222	548	490	5,040
1	Developer Fees	Mt Rose Surface Water Treatment Plant	2,500	5,100	-	-	-	7,600
<b>Subtotal Treatment Improvements</b>			<b>7,080</b>	<b>9,905</b>	<b>2,467</b>	<b>1,608</b>	<b>1,510</b>	<b>22,570</b>

**Project Locations:** Map of all *Treatment Plant Improvements* projects are highlighted in the following map.

Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

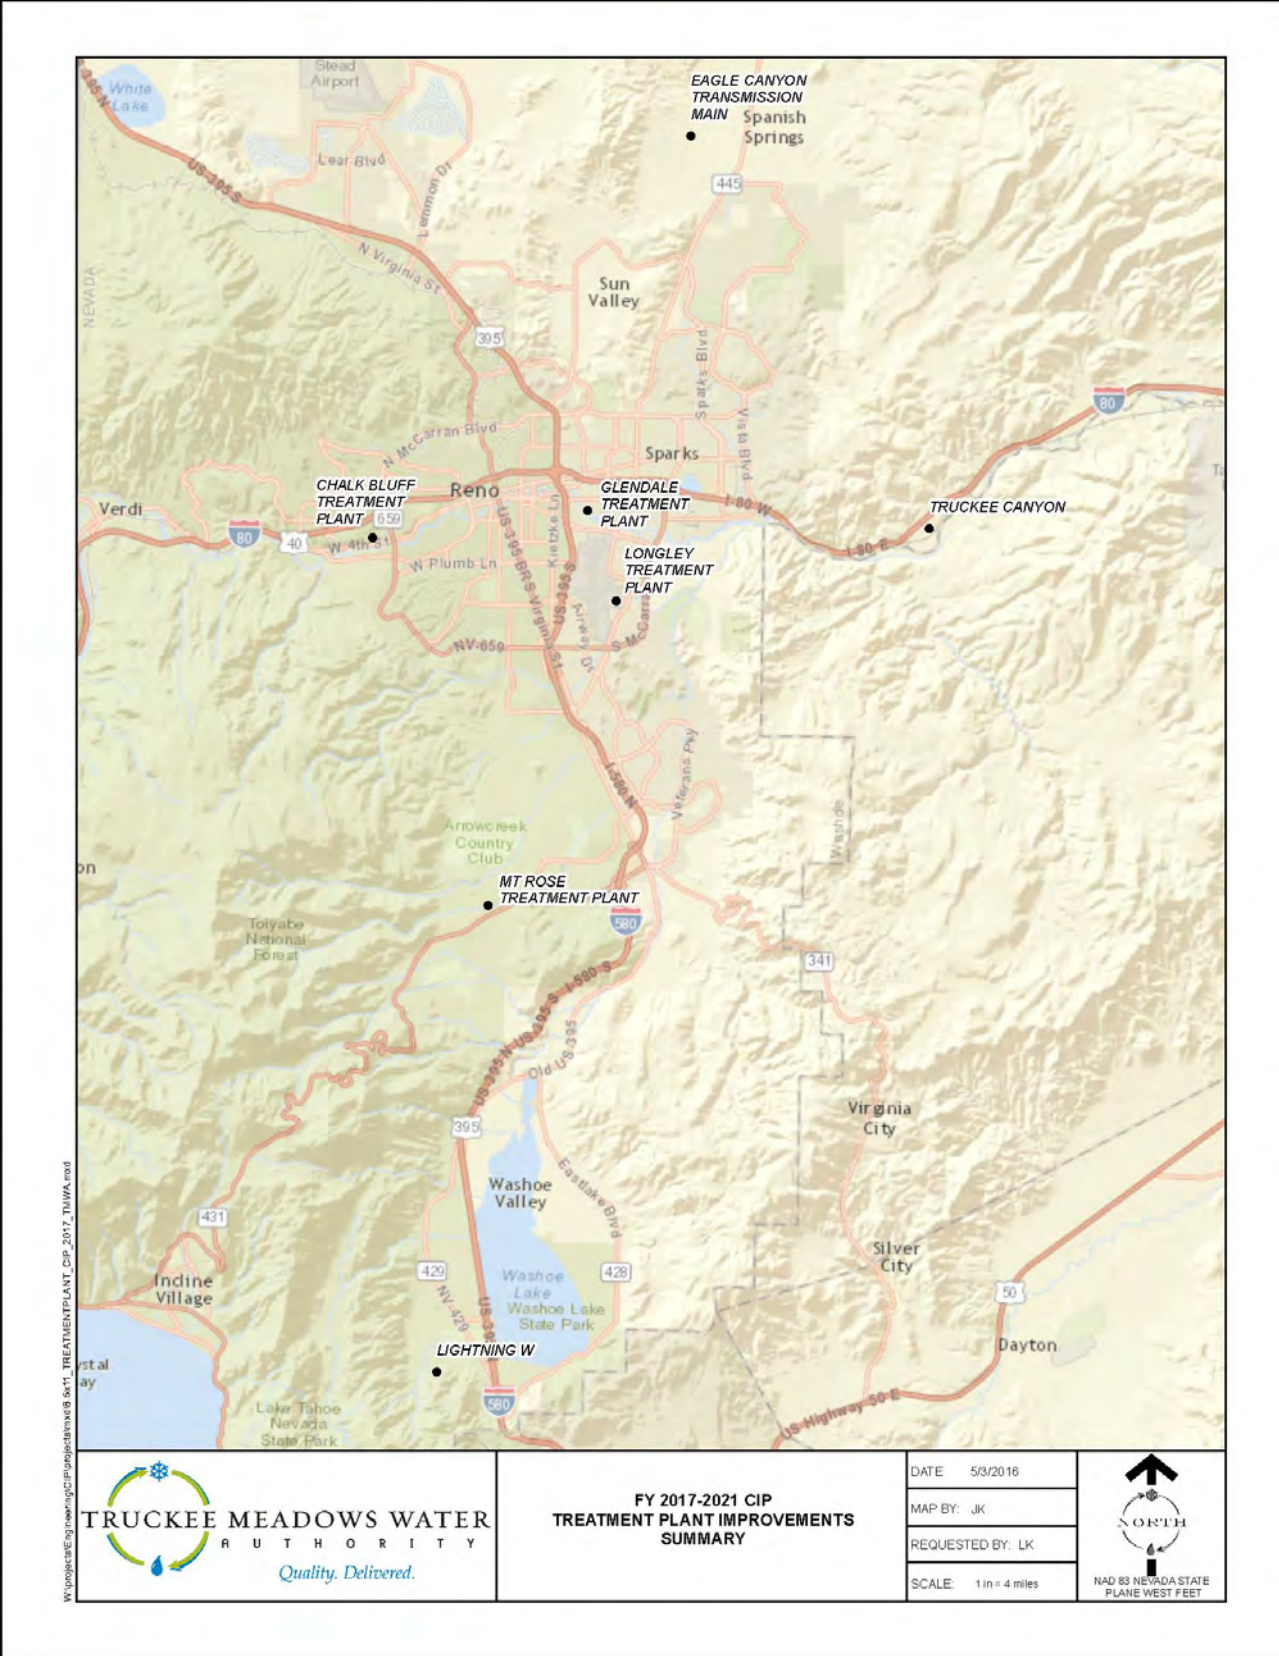

## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

## Treatment Plant Improvements


### Treatment Plants General Fix & Finish FY 2017 - 2021

**FUNDING TIMELINE:**

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
2	Customer Rates	Treatment Plants-General Fix & Finish	2,210	1,500	1,125	840	900	6,575

**PROJECT DESCRIPTION:** TMWA operates surface water treatment plants (WTP) at Chalk Bluff and Glendale and ground water treatment plants at Lightning W, Truckee Canyon and Longley Lane. Improvements are necessary from time to time to keep these facilities in good operating condition. The Chalk Bluff Treatment Plant is over 20 years old and the Glendale treatment plant and upgrades is over 35 years old. Each plant requires a certain amount of rehabilitation and improvements now and in the future. The Chalk Bluff plant can require raw water basin improvements, chemical system improvements, chlorine contact chamber/curtain replacements, finished water pump replacements, filter media change out, solids handling improvements, filter valve and actuator replacements, instrumentation and control upgrades, roof rehabilitation/replacement, additional standby generation capacity. The Glendale Treatment Plant can require similar improvements including replacement of turbidity meters, instrumentation upgrades, filter valve and actuator replacements, replacement of raw water and finished water pumps, filter media change out. Significant improvements have been made to the Glendale Treatment Plant over the past two years so most activity will be focused on the Chalk Bluff Treatment Facility. The Truckee Canyon WTP needs some improvements to improve reliable capacity. The Lightning W WTP is in need of filter media exchange and significant facility/structure improvements. The Longley WTP improvements will allow greater flexibility and reliability for water service to multiple distribution system zones.

**SCHEDULE:** This spending is classified as necessary since specific projects are sometimes not identifiable until areas not normally observable are examined during downtime.

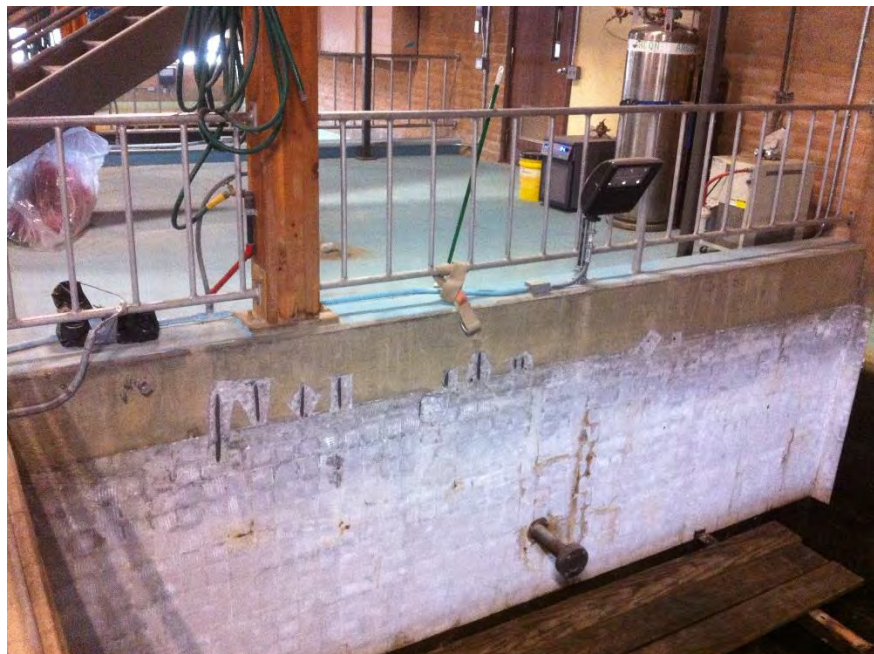**PROJECT:**

## Treatment Plant Improvements

### Eagle Canyon Transmission Main Phase 2 FY 2017 - 2018

#### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
2	Customer Rates	Eagle Canyon Transmission Main Phase 2	100	1,800		-	-	1,900

**PROJECT DESCRIPTION:** This project involves construction of approximately 4,700 feet of 24-inch pipe to complete a dedicated blending pipeline to the Desert Springs 2B Tank sites. The project allows poor quality groundwater from several wells on the west side of the Spanish Springs Valley to be utilized by blending with surface water from the Lazy 5 intertie.

**SCHEDULE:** The project is scheduled to be designed and bid in FY 2017 with construction in FY 2018.

#### PROJECT:



## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

**Treatment Plant Improvements****Truckee Canyon Water Treatment Improvements FY 2017 - 2021****FUNDING TIMELINE:**

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
2	Developer Fees	Truckee Canyon Water Treatment Improvements	400	35	60	60	60	615

**PROJECT DESCRIPTION:** The current treatment system removes arsenic, iron, and manganese and consists of one well, one tank, a greensand treatment system and an evaporation pond for backwash water with a total capacity of about 50 gallons per minute. The proposed expansion includes the equipping of a second well (for additional capacity and redundancy) and piping of the raw water to the water treatment facility. To increase the treatment capacity, it will be necessary to add a second filter unit and replace the decant and treated water booster pumps.

**SCHEDULE:** The improvements were scheduled for FY 2019, but may be constructed sooner (FY17) if growth occurs in the system. The additional treatment capacity will be required at the same time that the new well is equipped. Expenditures in FY 2019 – FY 2021 are contingent spending related to the addition of polymer feed systems to increase treatment efficiency and to fine tune the treatment process for chemical changes in the raw water.

**PROJECT:**

## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

**Treatment Plant Improvements****Lightning W Treatment Improvements FY 2017 – 2021****FUNDING TIMELINE:**

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
2	Developer Fees	Lightning W Treatment Improvements	500	60	60	160	60	840

**PROJECT DESCRIPTION:** The existing treatment process consists of two ion exchange resin pressure vessels to remove uranium. The project includes change out/replacement of the filter media, disposal of the spent media and miscellaneous improvements to the building that houses the treatment equipment including making provisions to hook up a portable generator.

**SCHEDULE:** The project is scheduled for FY 2017 and future resin replacements will ultimately be determined based on the remaining life of the ion exchange resin in the filter vessels.

**PROJECT:**


## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

**Treatment Plant Improvements****SCADA Rehab/Plant Operating Software FY 2017 - 2021****FUNDING TIMELINE:**

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
1	Customer Rates	SCADA Rehab/Plant Operating Software	1,370	1,410	1,222	548	490	5,040

**PROJECT DESCRIPTION:** SCADA (Supervisory Control and Data Acquisition) is the system by which TMWA monitors, records and controls the water system inputs, outputs, flows and pressures. Data acquired by these system controls are primarily monitored at the treatment plants, but the system equipment and technology is spread throughout the water system infrastructure. Much of the technology is approaching obsolescence and needs to be replaced with emphasis on standardization of programmable logic controllers (PLC) and other equipment. Therefore, TMWA settled on a systematic approach to updating the equipment and operating software starting in fiscal year 2015 with telemetry improvement in the ensuing four years to convert to wireless transmission of data feeds where possible.

**SCHEDULE:** The improvements and replacements of the equipment and operating software have already begun and will continue over the course of the five-year CIP.

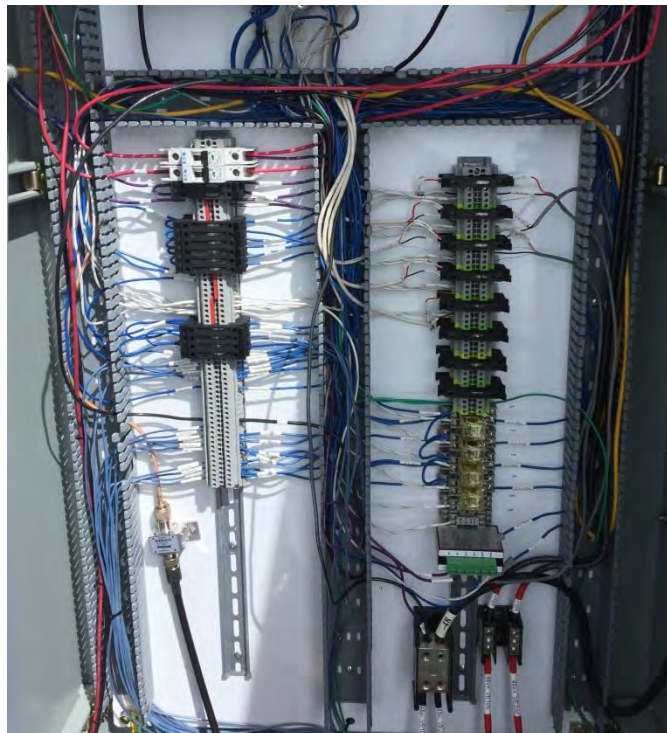**PROJECT:**

## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

**Treatment Plant Improvements****Mt. Rose Surface Water Treatment Plant FY 2017 - 2018****FUNDING TIMELINE:**

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
1	Developer Fees	Mt. Rose Surface Water Treatment Plant	2,500	5,100	-	-	-	7,600

**PROJECT DESCRIPTION:** Due to a combination of municipal and domestic well pumping and the extended drought, TMWA has determined that additional infrastructure and facilities are needed to utilize Thomas and Whites Creek resources to improve the long-term viability and sustainability of groundwater supplies in this region. To provide reliability of supply, avoid or reduce pumping costs and avoid major on-peak capacity improvements within the lower TMWA gravity system, a 4 MGD treatment plant located off of Callahan Road in the Monte Vista subdivision has received a SUP to treat Whites Creek and Thomas Creek water. The County's South Truckee Meadows Facility Plan recognized "The upper treatment plant is an integral component of the recommended water supply plan. Most importantly; it will provide recharge water and/or offset winter groundwater pumping in the upper Mt Rose fan area".

**SCHEDULE:** Permitting and design in FY 2017. Bidding and construction will occur in FY2017, and completion of construction in FY 2018.

**PROJECT:**

## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

## DISTRIBUTION SYSTEM IMPROVEMENTS – PRESSURE IMPROVEMENTS

### Summary

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
1	Customer Rates	Pressure Regulators Rehabilitation	650	500	450	450	450	2,500
1	Customer Rates & Reserves	Pressure Reducing Valve (Roll Seal) Removal	400	400	400	400	400	2,000
2	Customer Rates	Land Acquisitions	500	500	500	500	500	2,500
1	Customer Rates	Desert Springs Pressure Improvements	-	400	-	-	-	400
2	Customer Rates	Paloma BPS/PRS/Main	-	750	-	-	-	750
1	Developer Fees	Longley BPS/Double R Capacity Increase	-	-	500	-	-	500
1	Customer Rates	Pump Station Oversizing	100	100	100	100	100	500
1	Customer Rates	Pump Station Rebuilds Rehabilitation	1,800	1,400	1,000	1,000	1,000	6,200
2	Developer Fees	D'Andrea #3 Pump Station (developer reimbursement)	100	-	-	-	-	100
3	Developer Fees	Truckee River Highlands PS #1	-	-	-	-	1,000	1,000
1	Reserve	NAC Deficiencies-Saddlehorn, Upper Toll Road, STMGID East	340	360	100	2,400	350	3,550
2	Customer Rates	Mt. Rose Well #3 Pump Station Improvements	-	50	250	-	-	300
3	Customer Rates	Standby Generator Replacements	650	150	150	150	150	1,250
2	Customer Rates	Idlewild BPS Improvements	-	-	100	900	-	1,000
<b>Sub-Total Pressure Improvements</b>			<b>4,940</b>	<b>4,210</b>	<b>3,550</b>	<b>5,900</b>	<b>3,950</b>	<b>22,550</b>



## Distribution System Improvements – Pressure Improvements

### Pressure Regulators Rehabilitation FY 2017 - 2021

#### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
1	Customer Rates	Pressure Regulators Rehabilitation	650	500	450	450	450	2,500

**PROJECT DESCRIPTION:** Provision is made in the annual budget for major rehabilitation or complete reconstruction of several pressure regulators in the distribution system. TMWA has evaluated nearly 130 pressure regulator stations currently in service and has identified a number of pressure regulator stations requiring a certain amount of rehabilitation on an annual basis.

**SCHEDULE:** This is an ongoing rehabilitation project with about 130 individual stations identified as requiring rehabilitation or replacement over the next fifteen years.

#### PROJECT:



## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

## Distribution System Improvements – Pressure Improvements

### Pressure Reducing Valve (Roll Seal) Removal FY 2017 – 2021

**FUNDING TIMELINE:**

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
1	Customer Rates & Reserves	Pressure Reducing Valve (Roll Seal) Removal	400	400	400	400	400	2,000

**PROJECT DESCRIPTION:** There are approximately 180 pressure regulating stations in former County systems where Roll Seal pressure reducing valves are installed. These valves are subject to failure on a 3-5 year basis as compared to an expected life of 10-20 years for the Cla-Val regulator valves utilized in the TMWA system. A Roll Seal failure can result in significant damage to customer homes and in most cases requires a major service outage to repair or replace the valve.

**SCHEDULE:** Projects will be prioritized based on potential damage (unregulated pressure) and failure rate records. This will be a multi-year project to replace Roll Seals at about 20 stations per year.

**PROJECT:**

## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

## Distribution System Improvements – Pressure Improvements

### Land Acquisition FY 2017 – 2021

**FUNDING TIMELINE:**

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
2	Customer Rates	Land Acquisitions	500	500	500	500	500	2,500

**PROJECT DESCRIPTION:** TMWA has over 120 pump stations in service. Many of these pump stations have 480 volt electrical services and are underground (below grade) in locations that allows for water infiltration. Many underground pump stations will be reaching the end of their service life, which will require replacement of the underground vault. Rather than replace the stations in place TMWA is planning to acquire other sites so these stations can be rebuilt above grade improving access and safety. Acquisition of sites may be time consuming and may not be purchased in a particular year.

**SCHEDULE:** This is an ongoing project with funding to allow purchase of 3-4 sites per year depending on location and market conditions.

**PROJECT:**

## Distribution System Improvements – Pressure Improvements

### Desert Springs Pressure Improvements FY 2018

#### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
1	Customer Rates	Desert Springs Pressure Improvements	0	400	0	0	0	400

**PROJECT DESCRIPTION:** Distribution improvements to correct Nevada Administrative Code (NAC) pressure deficiencies in the southwest portion of the Desert Springs South system including a 1,500 foot 8-inch main tie between Shelby and Grove, a main/check valve tie at Taryn and Indian Springs, a main/check valve tie at Erin and Dolores and approximately 24 individual booster pump systems.

**SCHEDULE:** The improvements are scheduled for construction in FY 2018.

#### PROJECT TYPE:



## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

**Distribution System Improvements – Pressure Improvements**  
**Paloma Booster Pump Station/Pressure Regulating Station/Main**  
**FY 2018**

**FUNDING TIMELINE:**

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
2	Customer Rates	Paloma BPS/PRS/Main	-	750	-	-	-	750

**PROJECT DESCRIPTION:** The Paloma pressure zone is a continuous pumping zone in Lemmon Valley currently served by a booster pump station and 10,000 gallon pneumatic tank. The existing facilities do not provide adequate emergency or fire flow capacity to the 35 customers in the pressure zone. Assuming the North Valleys Integration project is constructed in FY 2017 as planned, the improvements will consist of a pressure regulating station supplied by a main tie to the medium-high pressure 24-inch Lemmon Drive main.

**SCHEDULE:** The improvements are currently scheduled for construction in FY 2018.

**PROJECT TYPE:**

## Distribution System Improvements – Pressure Improvements

### Longley Booster Pump Station/Double R Capacity Increase FY 2019

#### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
1	Developer Fees	Longley BPS/Double R Capacity Increase	-	-	500	-	-	500

**PROJECT DESCRIPTION:** Increase pumping capacity at the existing Longley Lane Booster Pump Station and make improvements at the Double R Intertie to provide additional peak supply to the Double Diamond area. The improvements at the Longley pump station will consist of replacing one of the existing pumps/motors with a new higher capacity unit along with electrical and motor starter upgrades. Certain components of the Double R Intertie will also be replaced to provide the additional capacity without excessive friction losses.

**SCHEDULE:** The improvements are scheduled for FY 2019 but are dependent upon growth. The improvements are necessary when supply through the Double R Intertie must exceed 5400 gallons per minute.

#### PROJECT:



## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

## Distribution System Improvements – Pressure Improvements

### Pump Station Oversizing FY 2017 – 2021

**FUNDING TIMELINE:**

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
1	Customer Rates	Pump Station Oversizing	100	100	100	100	100	500

**PROJECT DESCRIPTION:** The FY 2017 project consists of cash contributions towards construction of a new above ground booster pump station located near the Comstock Tank to replace the existing Sierra Pump Station which is located in an underground vault and is in need of major rehabilitation. TMWA would normally expend approximately \$1 million to replace an existing underground pump station with a new above ground station.

**SCHEDULE:** The improvements are ongoing, but the schedule is subject to change based on development & operational needs.

**PROJECT TYPE:**

## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

## Distribution System Improvements – Pressure Improvements

### Pump Station Rebuilds, Rehabilitations FY 2017 – 2021

**FUNDING TIMELINE:**

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
1	Customer Rates	Pump Station Rebuilds, Rehabilitations	1,800	1,400	1,000	1,000	1,000	6,200

**PROJECT DESCRIPTION:** TMWA has over 120 pump stations in service. An amount is budgeted annually for rehabilitation of TMWA’s older pump stations. Other pump stations may require pump, motor, and electrical upgrades. Budget for future years will allow TMWA to complete up to one above ground replacement project per year if suitable sites can be acquired. Otherwise, normal rehabilitation work will be performed per the priorities established by the study at a lower overall annual cost.

**SCHEDULE:** In FY 2017-2018 the Sun Valley #4 pump station will be relocated/replaced in an underground installation and will include a separate small storage tank for the zone to correct fire flow deficiencies from the intertie with the Sun Valley GID at Lupin and Wall Canyon Drive. The 2017 budget also includes the relocation of the Satellite Hills pump station to an above ground location and a main tie from the new Satellite Hills pump station to eliminate the existing underground Spanish Springs #1 pump station.

**PROJECT:**

## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

## Distribution System Improvements – Pressure Improvements

### D’Andrea #3 Pump Station (developer direct cost) FY 2017

**FUNDING TIMELINE:**

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
2	Developer Fees	D’Andrea #3 Pump Station (developer direct cost)	100	-	-	-	-	100

**PROJECT DESCRIPTION:** The project is a new developer funded booster pump station to serve a new phase of the D’Andrea residential development on the east side of Sparks. TMWA will design and construct the facilities on a site dedicated by the developer. The developer is responsible for 100 percent of the project. TMWA will be reimbursed for out of pocket expenditures as the project proceeds.

**SCHEDULE:** The developer originally requested an in-service date in the fall of 2016 but the completion date is subject to change based on the developer’s schedule.

**PROJECT TYPE:**

## Distribution System Improvements – Pressure Improvements Truckee River Highlands PS #1 FY 2021

### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
3	Developer Fees	Truckee River Highlands PS #1	-	-	-	-	1,000	1,000

**PROJECT DESCRIPTION:** The project is a new booster pump station located in the Truckee River Highlands development between W. Fourth St. and I-80. Completion of this pump station along with the proposed Truckee River Highlands #2 pump station and a main tie to the existing 16-inch main on Robb Drive will ultimately replace capacity in the US 40 booster pump system that will be diverted to the Verdi area. The new pump system will also improve reliability of supply to the Northgate area.

**SCHEDULE:** Construction is scheduled for FY 2021, but the actual construction date will be determined by growth and demand in the Verdi area.

### PROJECT TYPE:



## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

**Distribution System Improvements – Pressure Improvements  
NAC Deficiencies-Saddlehorn, Upper Toll Road, STMGID East  
FY 2017 – 2021**

**FUNDING TIMELINE:**

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
1	Reserve	NAC Deficiencies-Saddlehorn, Upper Toll Road, STMGID East	340	360	100	2,400	350	3,550

**PROJECT DESCRIPTION:** The project consists of main ties, hydrant installations and individual booster pump systems to be constructed in multiple locations in former STMGID service areas to correct NAC pressure and fire flow deficiencies. In order to correct deficiencies in the upper Toll Road area, it will be necessary to create a new higher pressure zone by constructing a new tank, booster pump station and approximately 6,300 feet of 12-inch main.

**SCHEDULE:** The deficiencies in Saddlehorn, on Sioux Trail, on Geiger Grade, on Westwind Circle and Terry Way will be addressed in FY 2017-2018. The new pressure zone on upper Toll Road will be constructed in FY 2020 subject to acquisition of the tank site on BLM property.

**PROJECT:**

**Distribution System Improvements – Pressure Improvements**  
**Mount Rose Well #3 Pump Station Improvements**  
**FY 2018 – 2019**

**FUNDING TIMELINE:**

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
2	Customer Rates	Mount Rose Well #3 Pump Station Improvements	-	50	250	-	-	300

**PROJECT DESCRIPTION:** The project involves rehab of the building, removal of pipe and valves that will no longer be necessary following completion of the Mt. Rose Conjunctive Use Phase 2 improvements and upgrades to electrical and control systems.

**SCHEDULE:** Improvements are scheduled for design in FY 2018 and construction in FY 2019.

**PROJECT:**

## Distribution System Improvements – Pressure Improvements Standby Generator Replacements FY 2017 – 2021

### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
3	Customer Rates	Standby Generator Replacements	650	150	150	150	150	1,250

**PROJECT DESCRIPTION:** A number of TMWA pumps stations have backup generation in case of power failures. TMWA incorporates a contingency for replacement of a generator in case of failure or if the Washoe County Health District requires backup generation at a particular site. No spending will occur unless necessary. This spending does not include backup generation for new pump stations required by and paid for by growth.

**SCHEDULE:** In FY 2017 a dedicated generator will be installed for the North Gate pump at Chalk Bluff.

### PROJECT:



## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

## Distribution System Improvements – Pressure Improvements

### Idlewild BPS Improvements FY 2019 – 2020

**FUNDING TIMELINE:**

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
2	Customer Rates	Idlewild BPS Improvements	-	-	100	900	-	1,000

**PROJECT DESCRIPTION:** The project will replace existing pumps and motors at the Idlewild BPS Transfer Station to insure adequate and reliable emergency capacity. It is the only booster station that is capable of transferring water from the Highland Reservoir Zone to the Hunter Creek Reservoir Zone. The station was originally constructed as part of the Idlewild WTP, and was never designed specifically for the purpose that it is used for today. Improvements identified in the project include: Properly sizing new pumps and motors for today's application, upgrading antiquated electrical systems and HVAC systems and bringing building up to modern construction codes. Evaluations by TMWA indicated this was the most cost effective alternative to provide a redundant supply for the zone and allowed retirement of the old 24-inch transmission pipeline on Plumb Lane all the way to the Hunter Creek Reservoir.

**SCHEDULE:** Design is scheduled for FY19 and construction should begin in FY20. This schedule may be moved based on system needs.

**PROJECT TYPE:**


## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

**DISTRIBUTION SYSTEM IMPROVEMENTS – WATER MAIN-  
DISTRIBUTION-SERVICE LINE IMPROVEMENTS  
Summary**

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
1	Customer Rates	Street & Highway Main Replacements	6,200	5,000	5,500	5,600	5,500	27,800
1	Customer Rates/ Developer Fees	Stead Main Replacement Phase II	5,000	-	-	-	-	5,000
1	Customer Rates	Hidden Valley Intertie Pumping Capacity	500	-	-	-	-	500
1	Customer Rates	California-Marsh 24" Main Replacement	100	900	-	-	-	1,000
2	Customer Rates	Booth, Sharon Way, Monroe 24" Main Replacements	-	-	100	3,100	-	3,200
2	Developer Fees	Verdi 18" Main oversizing	375	-	-	-	-	375
3	Developer Fees	South Virginia 24" Main (Kumle to Peckham)	-	-	100	900	-	1,000
2	Customer Rates	NE Sparks Feeder Main Relocation	900	-	-	-	-	900
1	Customer Rates	Spanish Springs -SC south Zone Conversion	700	-	-	-	-	700
2	Customer Rates	West Hidden Valley, Surge St., Piping Rock Main Replacements	1,000	-	230	500	-	1,730
2	Customer Rates	Spanish Springs Main Replacement	-	1,280	-	-	-	1,280
3	Developer Fees	Bonnie Ln., Snow Flower, Main Extensions	-	-	620	900	-	1,520
2	Developer Fees	South Truckee Meadows Capacity Improvements	-	-	400	-	-	400
1	Reserve	STMGID Conjunctive Use Facilities	1,500	2,100	-	-	-	3,600
1	Customer Rates	Arrowcreek-Mt. Rose Conjunctive Use Ph 2	1,200	-	-	-	-	1,200
1	Customer Rates	Arc Flash Improvements	100	100	-	-	-	200
3	Developer Fees	General Waterline Extensions	100	100	100	100	100	500
2	Customer Rates	Galv/Poly Service Line Replacements	400	400	400	400	400	2,000
<b>Subtotal Main-Distribution Improvements</b>			<b>18,075</b>	<b>9,880</b>	<b>7,450</b>	<b>11,500</b>	<b>6,000</b>	<b>52,905</b>

Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

**Project Locations:** Map of all *Water Main Distribution Service Line Improvements* projects are highlighted in the following map.

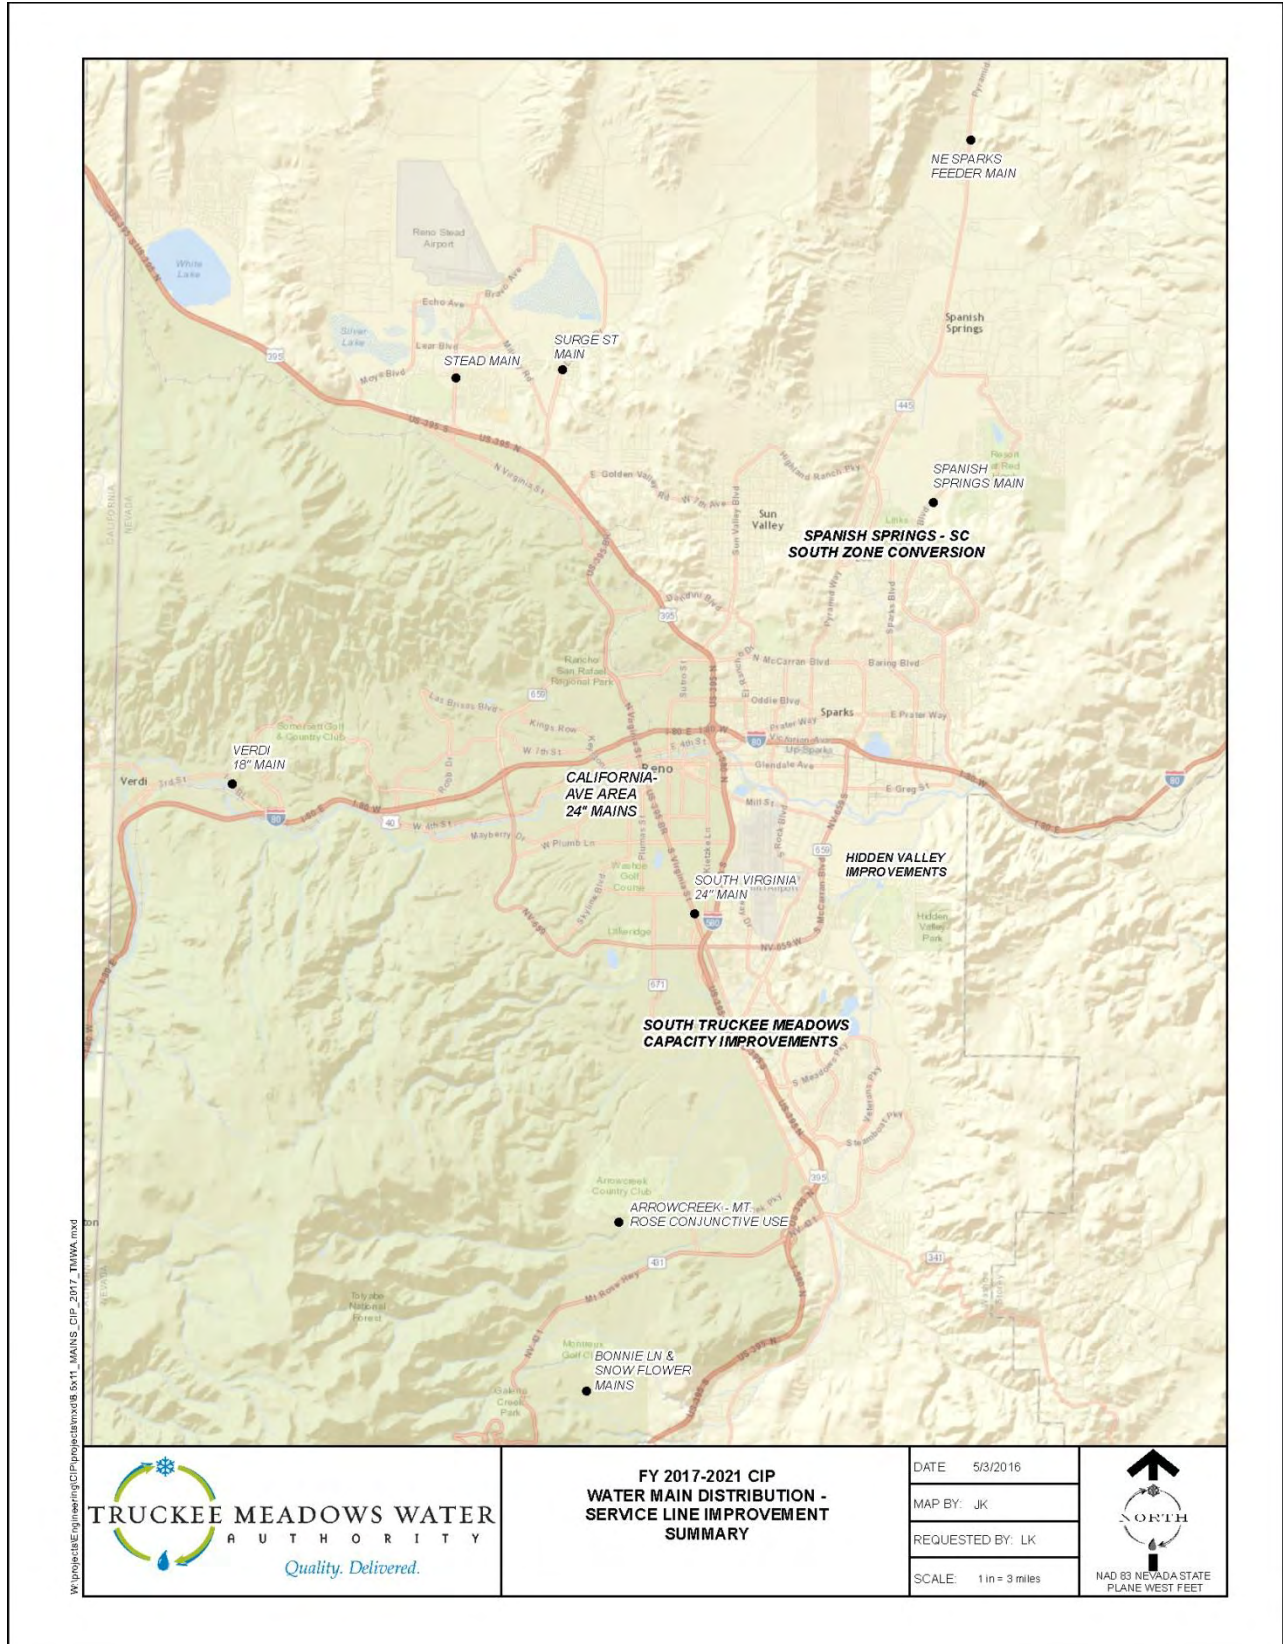

## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

## Distribution System Improvements – Water Main-Distribution- Service Line Improvements

### Street & Highway Main Replacements FY 2017 - 2021

#### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
1	Customer Rates	Street & Highway Main Replacements	6,200	5,000	5,500	5,600	5,500	27,800

**PROJECT DESCRIPTION:** Provision is made each year for water main replacements in conjunction with repaving efforts by the City of Reno, City of Sparks, and RTC. In addition to repaving projects, TMWA coordinates water main replacements with sewer main replacements in areas where TMWA also has older water lines. TMWA has planned for approximately \$5.0 million annually for these efforts, with \$6.2 million in 2017 so that TMWA can capitalize on repaving projects planned by other entities. The spending is reflective of historical activity. Levels of spending can vary year to year and are difficult to predict. These efforts by far are the most extensive for water system rehabilitation.

#### PROJECT TYPE:



## Distribution System Improvements – Water Main-Distribution- Service Line Improvements

### Stead Main Replacement Phase II FY 2017

#### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
1	Customer Rates/ Developer Fees	Stead Main Replacement Phase II	5,000	-	-	-	-	5,000

**PROJECT DESCRIPTION:** The Stead Main was originally constructed in the early 1950's to serve the Stead Air Force Base. Numerous leak repairs required in past years indicate that a significant amount of treated water has been lost through the pipeline. The pipeline is approaching the end of its service life and requires replacement.

Phase 2 includes replacement of the remaining 2.5 miles of the Stead Main between Golden Valley Drive and the Stead Tanks. This section of main is where the majority of the leaks have occurred and significant corrosion issues have been identified. This pipe provides the primary supply for the Stead-Silver Lake area.

**SCHEDULE:** The project is scheduled for construction in FY 2017.

#### PROJECT:



## Distribution System Improvements – Water Main-Distribution- Service Line Improvements

### Hidden Valley Intertie Pumping Capacity FY 2017


#### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
1	Customer Rates	Hidden Valley Intertie Pumping Capacity	500	-	-	-	-	500

**PROJECT DESCRIPTION:** When Washoe County constructed the Longley Lane Groundwater Treatment Facility to serve Hidden Valley and Bella Vista, they severed interties with the TMWA gravity system. A small single unit booster pump station located at the Children’s Cabinet was left intact, but it does not have the capacity to provide the required maximum day supply to the Hidden Valley area. The pump station also lacks reliability without a second pump. Since it is desired to serve the Hidden Valley system with surface water in non-drought years, a second pump station and intertie is necessary.

**SCHEDULE:** Design and construction is scheduled for FY 2017.

#### PROJECT:

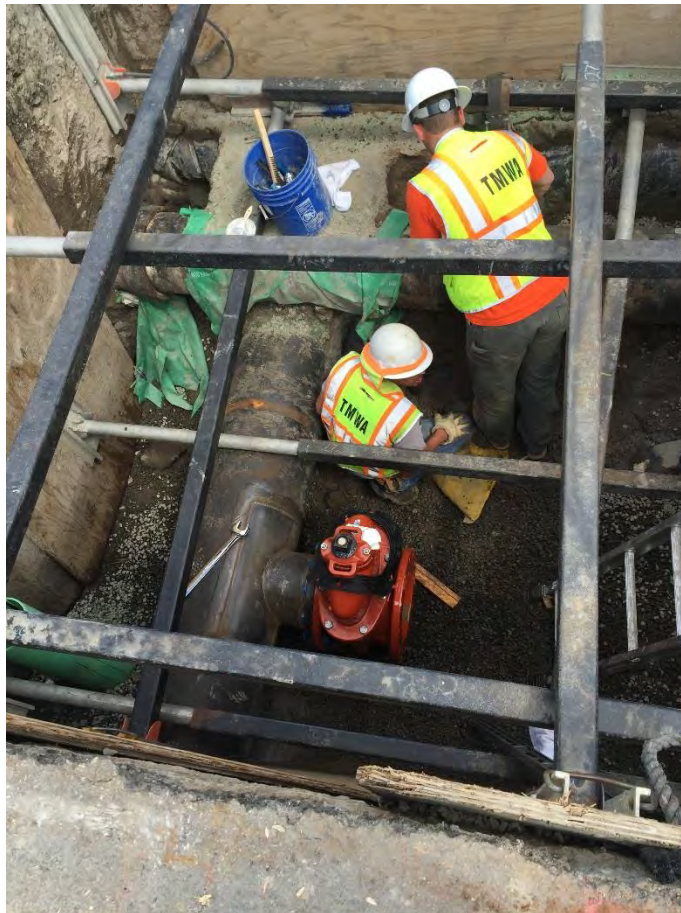

## Distribution System Improvements – Water Main-Distribution- Service Line Improvements

### California-Marsh 24" Main Replacement FY 2017 - 2018

#### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
1	Customer Rates	California-Marsh 24" Main Replacement	100	900	-	-	-	1,000

**PROJECT DESCRIPTION:** When TMWA evaluated the alternatives to replacing the 66-year old 24-inch main on Plumb Lane (installed in 1949) when the west end of Plumb Lane was widened in 2012-2013, it was decided to abandon that section of the pipeline, ultimately saving about \$4 million in replacement costs. The alternate plan for providing water service to the Hunter Creek gravity zone should a main break occur on the existing 42-inch Mayberry main, or if transmission capacity from Chalk Bluff was disrupted requires replacement of existing 24-inch mains on Booth, Sharon and Monroe (installed in 1948) to allow transfer of adequate capacity through the Idlewild transfer facilities. The construction of the California-Marsh Ave Intertie will be installed in FY 2018 so that a significant amount of pipe that is located under private property between California and Marsh can be retired.

**SCHEDULE:** The pipeline will be designed in FY 2017 and construction in fiscal year 2018.

#### PROJECT:



## Distribution System Improvements – Water Main-Distribution- Service Line Improvements

### Booth, Sharon Way, Monroe 24" Main Replacements FY 2019 – 2020

#### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
2	Customer Rates	Booth, Sharon Way, Monroe 24" Main Replacements	-	-	100	3,100	-	3,200

**PROJECT DESCRIPTION:** This project is a continuation of the previously described California-Marsh Intertie to provide reliable capacity to the Hunter Creek gravity zone. The project consists of about 6,900 feet of 24-inch main on Booth, Sharon to Plumb Lane and on Monroe between Sharon and Nixon to supply the Nixon-Monroe regulator.

**SCHEDULE:** Design is scheduled for FY 2019 and construction is scheduled for FY 2020. TMWA will attempt to coordinate construction with other municipal infrastructure projects if possible, but the existing pipes will be 72-years old by the proposed construction date.

#### PROJECT TYPE:



## Distribution System Improvements – Water Main-Distribution- Service Line Improvements

### Verdi 18" Main Oversizing FY 2017

#### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
2	Developer Fees	Verdi 18" Main Oversizing	375	-	-	-	-	375

**PROJECT DESCRIPTION:** The project consists of oversizing of a developer installed main to serve a residential project on the east side of Verdi. The facility plan to serve future demand in Verdi necessitates the construction of an 18" main. A developer who wants to develop near the Canepa Ranch area only requires a 12" main. TMWA will work with the developer to install an 18" main and pay for oversizing. Development of this area has become more certain and the priority of this project was raised to necessary spending from contingency spending in the 2017-2021 CIP.

**SCHEDULE:** It is anticipated that the developer's project will move forward in FY 2017.

#### PROJECT TYPE:



## Distribution System Improvements – Water Main-Distribution-Service Line Improvements

### South Virginia 24" Main (Kumle to Peckham) FY 2019 – 2020

**FUNDING TIMELINE:**

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
3	Developer Fees	South Virginia 24" Main (Kumle to Peckham)	-	-	100	900	-	1,000

**PROJECT DESCRIPTION:** The project consists of construction of about 1,700 feet of new 24-inch water main on South Virginia Street between Kumle Lane and Peckham Lane. The project is required to expand transmission capacity to the South Truckee Meadows area.

**SCHEDULE:** Design is planned in FY 2019 and construction is planned in FY 2020 subject to adjustment for actual growth or coordination with road improvements.

**PROJECT TYPE:**



## Distribution System Improvements – Water Main-Distribution- Service Line Improvements

### NE Sparks Tank Feeder Main Relocation FY 2017

#### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
2	Customer Rates	NE Sparks Tank Feeder Main Relocation	900	-	-	-	-	900

**PROJECT DESCRIPTION:** The NE Sparks Tank Feeder Main was constructed in 1988 within private easements several years prior to the construction of South Los Altos Parkway. The final alignment selected for South Los Altos Parkway does not follow the alignment of the tank feeder main. As a result, the tank feeder main now runs through developed properties next to buildings, under parking areas and at considerable depth in some locations. This situation presents potential problems for access to the pipe for maintenance and repair of the critical pipeline. This project will relocate approximately 3000 feet of the 18-inch tank feeder main out into the public right-of-way in South Los Altos Parkway.

**SCHEDULE:** The improvements will be constructed in FY 2017.

#### PROJECT:



## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

## Distribution System Improvements – Water Main-Distribution- Service Line Improvements

### Spanish Springs – Spring Creek South Zone Conversion FY 2017

#### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
1	Customer Rates	Spanish Springs –Spring Creek south Zone Conversion	700	-	-	-	-	700

**PROJECT DESCRIPTION:** The project will convert the southern portion of the Spring Creek system over to the Pyramid pump zone and avoid operational problems of adequately replenishing storage in the Spring Creek tanks. The project will require construction of main ties on Pah Rah Drive, Panama Drive and Pyramid Hwy, removal/demolition of the Spring Creek tanks, modification of the Canoe Hill intertie, retirement of the Blue Skies flow control valve and a main tie connection south of the Lazy 5 intertie.

**SCHEDULE:** The improvements are scheduled for construction in FY 2017.

#### PROJECT:



## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

## Distribution System Improvements – Water Main-Distribution- Service Line Improvements

### West Hidden Valley, Surge St., Piping Rock Main Replacements FY 2017 – 2020

#### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
2	Customer Rates	West Hidden Valley, Surge St., Piping Rock Main Replacements	1,000	-	230	500	-	1,730

**PROJECT DESCRIPTION:** The project consists of priority main replacements in former County systems including replacing 12” steel pipe on Piping Rock and West Hidden Valley Drive in the Hidden Valley system with extensive history of leaks. Also, replacement of existing 6” steel pipe on Surge Street in the Lemmon Valley system is planned.

**SCHEDULE:** Replacement of the West Hidden Valley Drive main is scheduled for FY 2017, the Surge Street main is scheduled for FY 2019 and the Piping Rock main replacement is scheduled for FY 2020.

#### PROJECT TYPE:



## Distribution System Improvements – Water Main-Distribution- Service Line Improvements

### Spanish Springs Main Replacement FY 2018

#### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
2	Customer Rates	Spanish Springs Main Replacement	-	1,280	-	-	-	1,280

**PROJECT DESCRIPTION:** The project involves replacement of approximately 6,700 feet of existing Schedule 40 PVC pipe on Cordoba Blvd, Virgil Dr, Virgil Ct, La Posada, Benedict Dr, Valparaiso Ct and Cortez Ct in Spanish Springs. The actual extent of the Schedule 40 pipe has not been determined, but several of these substandard pipes have failed in the last several years in the areas noted.

**SCHEDULE:** Construction is currently scheduled for FY 2018.

#### PROJECT TYPE:



## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

## Distribution System Improvements – Water Main-Distribution- Service Line Improvements

### Bonnie Ln., Snow Flower, Main Extensions FY 2019 – 2020

#### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
3	Developer Fees	Bonnie Ln., Snow Flower, Main Extensions	-	-	620	900	-	1,520

**PROJECT DESCRIPTION:** The project involves main extensions in the Mt. Rose system to provide looping of the distribution system and eliminate these two long dead end mains in accordance with the NAC 445A water regulations.

**SCHEDULE:** Unless required and constructed sooner by specific developments, the projects are scheduled for construction in FY 2019 and FY 2020.

#### PROJECT TYPE:



## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

## Distribution System Improvements – Water Main-Distribution- Service Line Improvements

### South Truckee Meadows Capacity Improvements FY 2019

#### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
2	Developer Fees	South Truckee Meadows Capacity Improvements	-	-	400	-	-	400

**PROJECT DESCRIPTION:** The project consists of a 1,000 foot long extension of a 12-inch main on Offenhauser and a new intertie to the Area 11 distribution system on Gateway. Also included is an 8-inch main tie between Portman and Bluestone. The improvements will provide an incremental increase in capacity to the South Truckee Meadows area where growth is anticipated to occur.

**SCHEDULE:** The improvements are scheduled for construction in FY 2019.

#### PROJECT:



## Distribution System Improvements – Water Main-Distribution- Service Line Improvements

### STMGID Conjunctive Use Facilities FY 2017 – 2018

#### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
1	Reserve	STMGID Conjunctive Use Facilities	1,500	2,100	-	-	-	3,600

**PROJECT DESCRIPTION:** The project involves construction of a new booster pump station on the reclaim water reservoir site on Arrowcreek Parkway and approximately 8,100 feet of 14-inch discharge pipe on Arrowcreek Parkway to the STMGID Tank 4/5 pressure zone. Approximately \$0.5 million of the \$3.6 million will be used for pipeline oversizing to be allocated to development. The facilities will provide off-peak supply which will allow TMWA to implement conjunctive use in the STMGID West system.

**SCHEDULE:** The facilities are scheduled for design in FY 2017 and construction in FY 2017 and 2018.

#### PROJECT TYPE:



## Distribution System Improvements – Water Main-Distribution- Service Line Improvements

### Arrowcreek-Mt. Rose Conjunctive Use Phase 2 FY 2017

#### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
1	Customer Rates	Arrowcreek-Mt. Rose Conjunctive Use Ph 2	1,200	-	-	-	-	1,200

**PROJECT DESCRIPTION:** Phase 2 facilities consist of new booster pumps at the Mt. Rose Well #5 site and a SCADA controlled intertie between the Mt. Rose and Arrowcreek systems to expand the delivery of off-peak conjunctive use water to the remainder of the water system on the Mt. Rose-Galena fan area.

**SCHEDULE:** These facilities are scheduled for construction in FY 2017.

#### PROJECT:



## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

## Distribution System Improvements – Water Main-Distribution- Service Line Improvements

### Arc Flash Improvements FY 2017 – 2018

#### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
1	Customer Rates	Arc Flash Improvements	100	100	-	-	-	200

**PROJECT DESCRIPTION:** This project involves performance of short circuit studies, breaker analysis and coordination studies and arc flash hazard studies for newly acquired County and STMGID facilities in conformance with National Electric Code (NEC), OSHA and National Fire Protection Agency regulations. Ultimately the results of the studies will allow identification of potential electrical hazards for workers so that they can utilize appropriate personal protective equipment.

**SCHEDULE:** Completion of the studies, adjustment or replacement of breakers and hazard labeling of electrical equipment will be phased over a two year period between FY 2016 and FY 2018.

#### PROJECT:



## Distribution System Improvements – Water Main-Distribution- Service Line Improvements

### General Waterline Extensions FY 2017 – 2021

#### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
3	Customer Rates	General Waterline Extensions	100	100	100	100	100	500

**PROJECT DESCRIPTION:** A nominal amount of funding is budgeted each year to accommodate water main extensions to correct pressure, dead ends and fire flow deficiencies as they are identified. Funds will not be expended unless determined necessary.

**SCHEDULE:** This is an ongoing annual project budget. Projects will not be constructed unless determined necessary to correct deficiencies identified above.

#### PROJECT:



## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

## Distribution System Improvements – Water Main-Distribution- Service Line Improvements

### Galvanized/Poly Service Line Replacements FY 2017 – 2021

#### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
2	Customer Rates	Galv/Poly Service Line Replacements	400	400	400	400	400	2,000

**PROJECT DESCRIPTION:** TMWA has shifted from just repairing service lines from the street main to the curb valve or meter box to completely replacing service lines that are galvanized steel or polybutylene. These two materials are responsible for many after-hours call outs which escalate overtime expenses to repair leaks in the street because the galvanized lines are corroded, and polybutylene once thought very durable, becomes brittle and cracks or splits very easily. Just repairing these lines does not prevent them from leaking in the near future, escalating repair costs while further damaging city streets. Complete replacement provides a permanent repair in a cost effective manner and prevents further water system losses.

**SCHEDULE:** This is an ongoing annual project budget. Service lines will be replaced as they are identified.

#### PROJECT:



## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan


## POTABLE WATER STORAGE IMPROVEMENTS

### Summary

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
2	Customer Rates	Peavine Tank Replacement	100	2,500	-	-	-	2,600
2	Developer Fees/ Customer Rates	Sun Valley #2 Tank	-	-	1,750	-	-	1,750
2	Developer Fees	Rattlesnake Ring Addition	-	-	800	-	-	800
1	Reserve	Zone 11 Tank	-	3,000	-	-	-	3,000
3	Developer Fees	Fish Springs Ranch #2	-	-	-	-	100	100
1	Reserve	Former STMGID Tank Recoats	170	-	220	-	300	690
1	Customer Rates	Storage Tank Recoats; Access; Drainage Improvements	780	860	800	800	800	4,040
<b>Subtotal Storage Improvements</b>			<b>1,050</b>	<b>6,360</b>	<b>3,570</b>	<b>800</b>	<b>1,200</b>	<b>12,980</b>

**Project Locations:** Map of all *Potable Water Storage Improvements* projects are highlighted in the following map.

Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

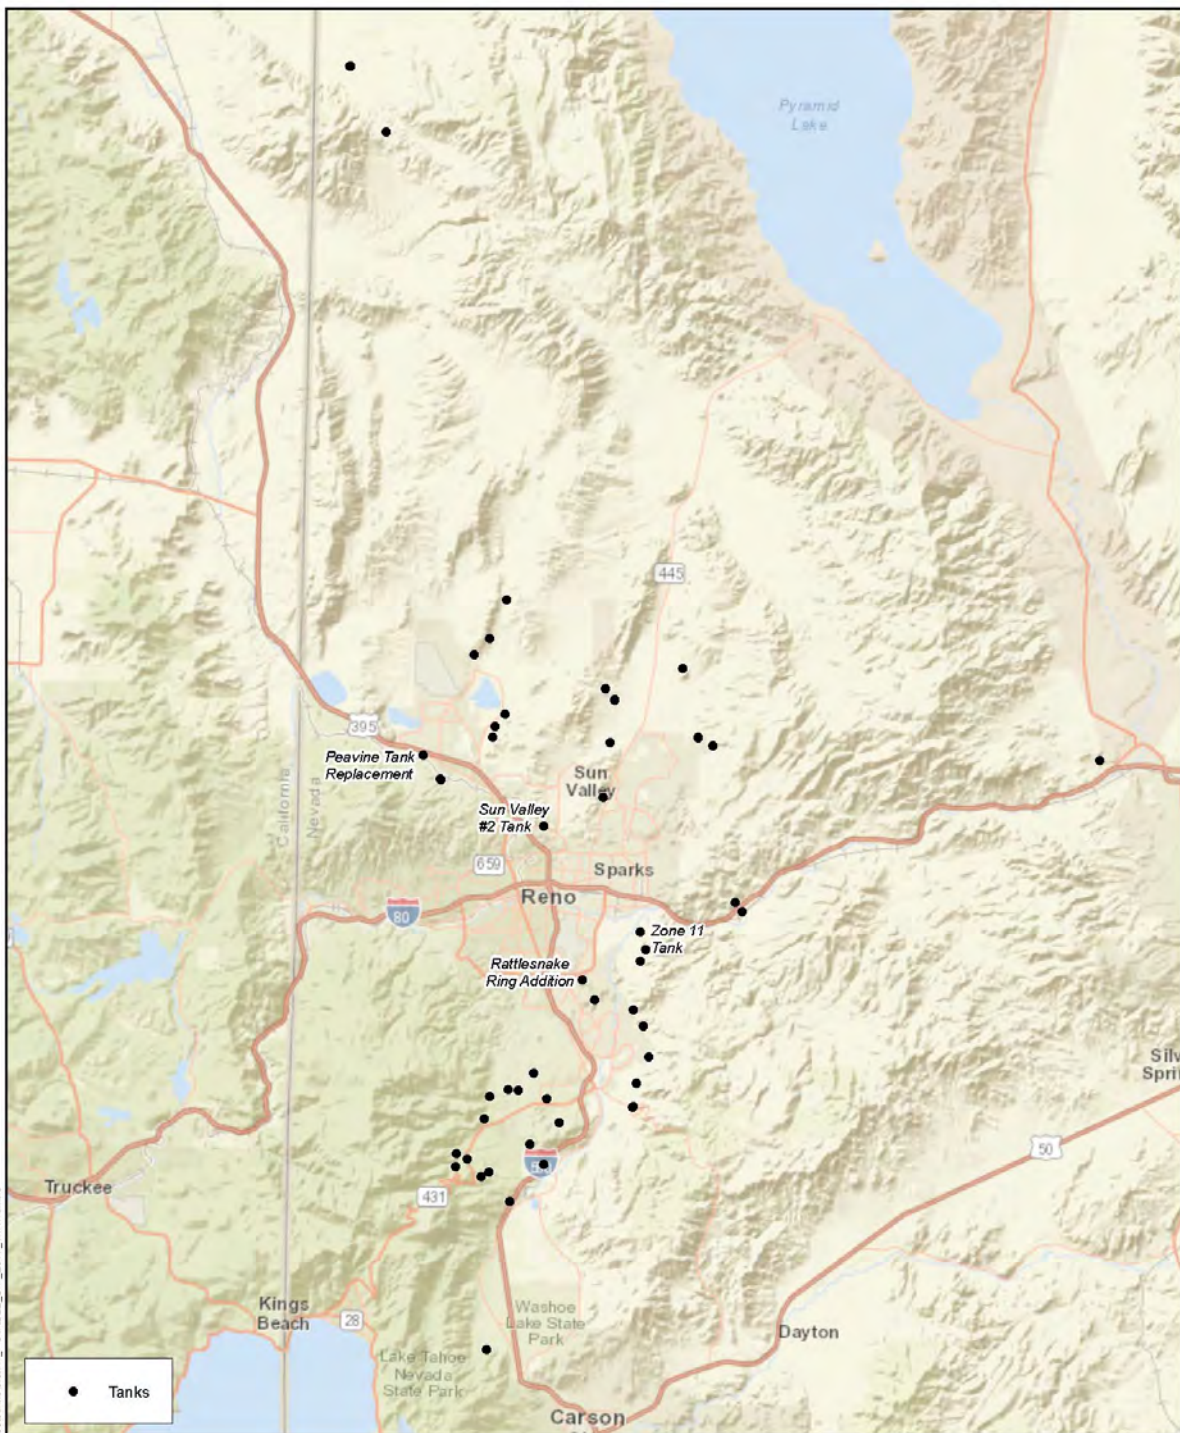

W:\projects\Engineering\CIP\potable\cimap\8011\_POTABLE\_CIP\_2017\_TMWWA.mxd



**FY 2017-2021 CIP  
POTABLE WATER STORAGE IMPROVEMENTS  
SUMMARY**

DATE	5/3/2016
MAP BY:	JK
REQUESTED BY:	LK
SCALE	1 in = 7 miles



## Potable Water Storage Improvements Peavine Tank Replacement FY 2017 - 2018

### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
2	Customer Rates	Peavine Tank Replacement	100	2,500	-	-	-	2,600

**PROJECT DESCRIPTION:** The Peavine Tank is an existing 2.0 MG pre-stressed concrete tank constructed by the Silver Lake Water Company in 1978. A 2008 inspection of the tank interior revealed significant areas of concrete spalling and exposed reinforcing steel in the tank roof. Repairs were attempted in 2009. The repair process required chipping and cleaning of damaged areas which revealed much more extensive deterioration than was initially estimated. Over 1400 square feet of damage to the roof dome structure was actually repaired as compared to the original estimate of 400 square feet. Significant delamination of the roof structure is expected to continue. In addition, closer inspection during the roof repair work indicated moderate cracking of the dome ring and walls. Damage to the pre-stressed dome ring is of special concern since it resists the thrust of the arched roof in tension. The replacement tank will be a 2.5 MG above ground steel tank. The additional volume will accommodate future storage needs of the Stead system and eliminate a future storage tank project.

**SCHEDULE:** It was anticipated that the 2008 repairs would provide an additional 5-7 years of life for the existing structure; therefore, construction is scheduled for FY 2018.

### PROJECT:



## Potable Water Storage Improvements

### Sun Valley #2 Tank FY 2019

#### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
2	Developer Fees/ Customer Rates	Sun Valley #2 Tank	-	-	1,750	-	-	1,750

**PROJECT DESCRIPTION:** TMWA continues to analyze opportunities to consolidate pump zones to eliminate future pump station replacement costs and to increase reliability to continuous pumping zones. Several years ago, TMWA consolidated the Sutro #1 pump zone with the Sun Valley/Sullivan pump zone, placing additional capacity requirements on the Sun Valley zone. This tank is needed to provide the required emergency storage capacity to the expanded zone and will also provide the capacity for the Sun Valley zone to reach buildout.

**SCHEDULE:** The project is scheduled for construction in FY 2019 subject to successful acquisition of a suitable tank site which is elevation sensitive.

#### PROJECT TYPE:



## Potable Water Storage Improvements Rattlesnake Ring Addition FY 2019

### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
2	Developer Fees	Rattlesnake Ring Addition	-	-	800	-	-	800

**PROJECT DESCRIPTION:** Additional storage is necessary to meet the total system capacity requirements of NAC 445A regulations under buildout conditions. The bulk of the additional storage is planned for the major gravity zones since distribution facilities make the storage available to other parts of the system. The existing 2.5 MG Rattlesnake Tank is the only major storage facility on the south end of the gravity system. The addition of another 8-foot high ring to the tank would increase storage by about 1.0 MG and would also increase the available head to allow the tank to operate under a wider range of hydraulic conditions.

**SCHEDULE:** The project is currently scheduled for construction in FY 2019.

### PROJECT TYPE:



## Potable Water Storage Improvements Zone 11 Tank FY 2018

**FUNDING TIMELINE:**

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
1	Reserve	Zone 11 Tank	-	3,000	-	-	-	3,000

**PROJECT DESCRIPTION:** The project involves construction of a 2.5 MG above ground welded steel storage tank in Area 11 of the South Truckee Meadows formerly owned by STMGID. Due to growth in the area over the last several years, additional storage is required to meet the requirements of the NAC 445A regulations and TMWA standards.

**SCHEDULE:** The project is currently scheduled for construction in FY 2018.

**PROJECT TYPE:**



## Potable Water Storage Improvements Fish Springs Ranch #2 FY 2021

### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
3	Developer Fees	Fish Springs Ranch #2	-	-	-	-	100	100

**PROJECT DESCRIPTION:** Ultimately, a second storage tank is needed at the terminus of the Fish Springs pipeline at the north end of Lemmon Valley to equalize demand and supply during peak use periods.

**SCHEDULE:** The project is currently scheduled for design in FY 2021 with construction to follow in FY 2022. The actual schedule will be dependent upon the rate of growth in the North Valleys.

### PROJECT:



## Potable Water Storage Improvements Former STMGID Tank Recoats FY 2017 – 2021

### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
1	Reserve	Former STMGID Tank Recoats	170	-	220	-	300	690

**PROJECT DESCRIPTION:** The former STMGID system included a total of seven storage tanks providing a total storage capacity of about 6.2 million gallons. A number of these tanks will be inspected annually on a rotating basis. Based upon these inspection observations, a determination is made as to whether interior or exterior tank coatings or other fix and finish work is required. Tank interior coating/liners and exterior paint are generally replaced every 15 years.

**SCHEDULE:** This is an ongoing annual project. It is anticipated that two tanks will need to be recoated approximately every 2-3 years.

### PROJECT TYPE:



**Potable Water Storage Improvements**  
**Storage Tank Recoats; Access; Drainage Improvements**  
**FY 2017 - 2021**

**FUNDING TIMELINE:**

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
1	Customer Rates	Storage Tank Recoats; Access; Drainage Improvements	780	860	800	800	800	4,040

**PROJECT DESCRIPTION:** TMWA has a very proactive tank reservoir maintenance program whereby 20% of all tanks are inspected annually on a rotating basis. Based upon these inspection observations, a determination is made as to whether interior tank coatings (for steel tanks) or other fix and finish work is required. TMWA has 93 storage tanks in service, with combined storage of approximately 121 million gallons. Interior coating/liners are generally replaced every 15 years resulting in about six tanks per year having this work performed. The budget and plan also includes exterior painting of steel tanks and any replacement of any interior components that may be corroded.

**SCHEDULE:** This is an ongoing annual project. It is anticipated that six tanks will need to be recoated approximately every year.

**PROJECT:**

## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

**HYDROELECTRIC IMPROVEMENTS****Summary**

<b>Priority</b>	<b>Funding Source</b>	<b>Description</b>	<b>FY17</b>	<b>FY18</b>	<b>FY19</b>	<b>FY20</b>	<b>FY21</b>	<b>CIP Total</b>
<b>1</b>	Customer Rates	Flume, Forebay, Diversion, and Canal Improvements	2,075	845	755	800	800	5,275
<b>3</b>	Customer Rates	Hydro Plant Generator Rewinds	-	-	350	350	350	1,050
<b>Subtotal Hydroelectric Improvements</b>			<b>2,075</b>	<b>845</b>	<b>1,105</b>	<b>1,150</b>	<b>1,150</b>	<b>6,325</b>

**Project Locations:** Map of all *Hydroelectric Improvements* projects are highlighted in the following map.

Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan



W:\projects\Engineering\CIP\map\carroll08\_sx11\_HYDROELECTRIC\_CIP\_2017\_TWMA.mxd



**FY 2017-2021 CIP  
HYDROELECTRIC IMPROVEMENTS  
SUMMARY**

DATE	5/3/2016
MAP BY:	JK
REQUESTED BY:	LK
SCALE:	1 in = 1 miles



## Hydroelectric Improvements

### Flume, Forebay, Diversion, and Canal Improvements

#### FY 2017 - 2021

#### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
1	Customer Rates	Flume, Forebay, Diversion, and Canal Improvements	2,075	845	1,105	1,150	1,150	6,325

**PROJECT DESCRIPTION:** Provision is made each year for hydroelectric flume reconstruction from unexpected rock falls, ice expansion damage, and penstock reconstruction. Operation of hydroelectric facilities provides power generation revenue, which significantly offsets the power costs of TMWA. TMWA's three operating hydroelectric facilities have nearly 12,150 feet of flume and 13,125 feet of canal combined. TMWA average service life for flume structures is 35 years using treated timbers, at an average replacement cost of approximately \$1,000 per lineal foot of flume. The present cost to replace a linear foot of flume depends on the location and height of the flume structure. A number of projects would be campaigned in fiscal year 2016 while river flows are at a minimum including replacement of the penstock at Fleish facility.

**SCHEDULE:** Ongoing annual evaluation and prioritization of flume and canal condition in the early spring (winter weather can change priorities) to identify projects for fall construction when historically, river flows are lower.

#### PROJECT:



## Hydroelectric Improvements

### Hydro Plant Generator Rewinds FY 2019 – 2021


#### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
3	Customer Rates	Hydro Plant Generator Rewinds	-	-	350	350	350	1,050

**PROJECT DESCRIPTION:** The Fleish generator was last rewound in 1958 and is still operational. The typical in service life of this type of generator is about 50 years. We are currently monitoring this for any signs of failure (hot spots, loss of capacity, & any imbalance of phase amps). The two Washoe generators were damaged in a flood in 2006. The units were cleaned and repaired but suffered damage to the core laminations that has shortened the operating life. Spending in fiscal years 19, 20 and 21 centers on rewinds of these generators which are expected to improve energy output. TMWA tries to schedule projects which require significant downtime in years of potential lower generation.

**SCHEDULE:** Washoe Hydro Plant generators FY19 & FY20, Fleish Hydro Plant generator FY21. This schedule may be adjusted depending on river flows and generator condition evaluation.

#### PROJECT:

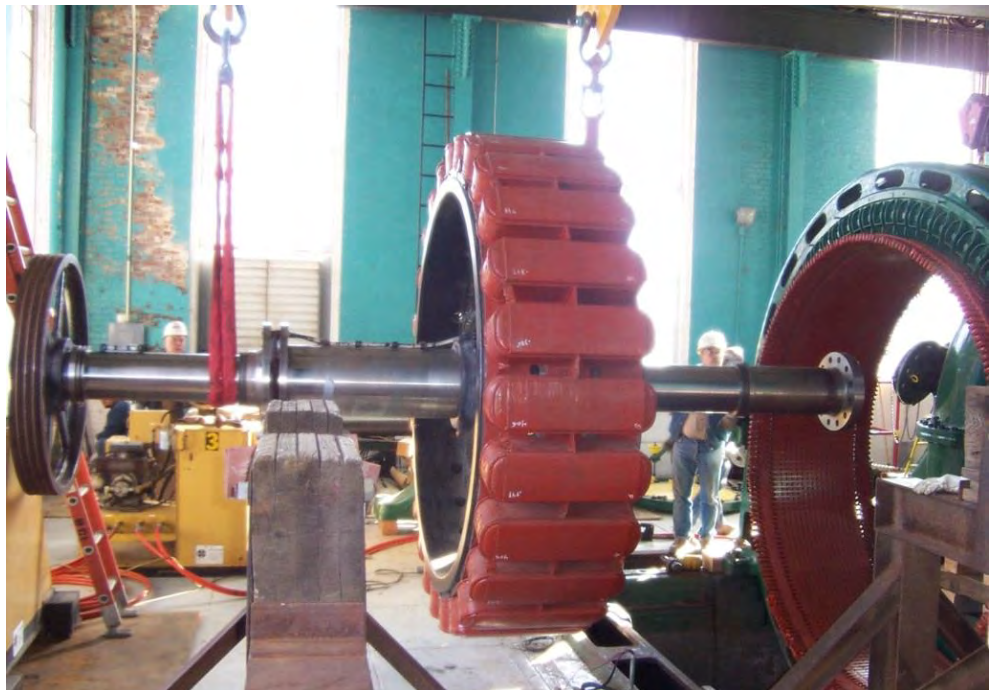


## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

**CUSTOMER SERVICE OUTLAYS****Summary**

<b>Priority</b>	<b>Funding Source</b>	<b>Description</b>	<b>FY17</b>	<b>FY18</b>	<b>FY19</b>	<b>FY20</b>	<b>FY21</b>	<b>CIP Total</b>
<b>3</b>	Customer Rates	Meter Reading Equipment	-	60	-	60	-	120
<b>1</b>	Developer Fees	New Business Meters	350	350	350	175	100	1,325
<b>1</b>	Customer Rates	Mueller Pit Replacements former Washoe County	125	125	125	375	125	875
<b>1</b>	Reserve	Mueller Pit Replacements former STMGID	75	75	75	75	75	375
<b>1</b>	Customer Rates	Meter -ERT-RTR Replacements	1,250	1,250	1,250	1,250	1,250	6,250
<b>Subtotal Customer Service</b>			<b>1,800</b>	<b>1,860</b>	<b>1,800</b>	<b>1,935</b>	<b>1,550</b>	<b>8,945</b>

**Project Locations:** Map of all *Customer Service Outlays* projects are highlighted in the following map.

Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

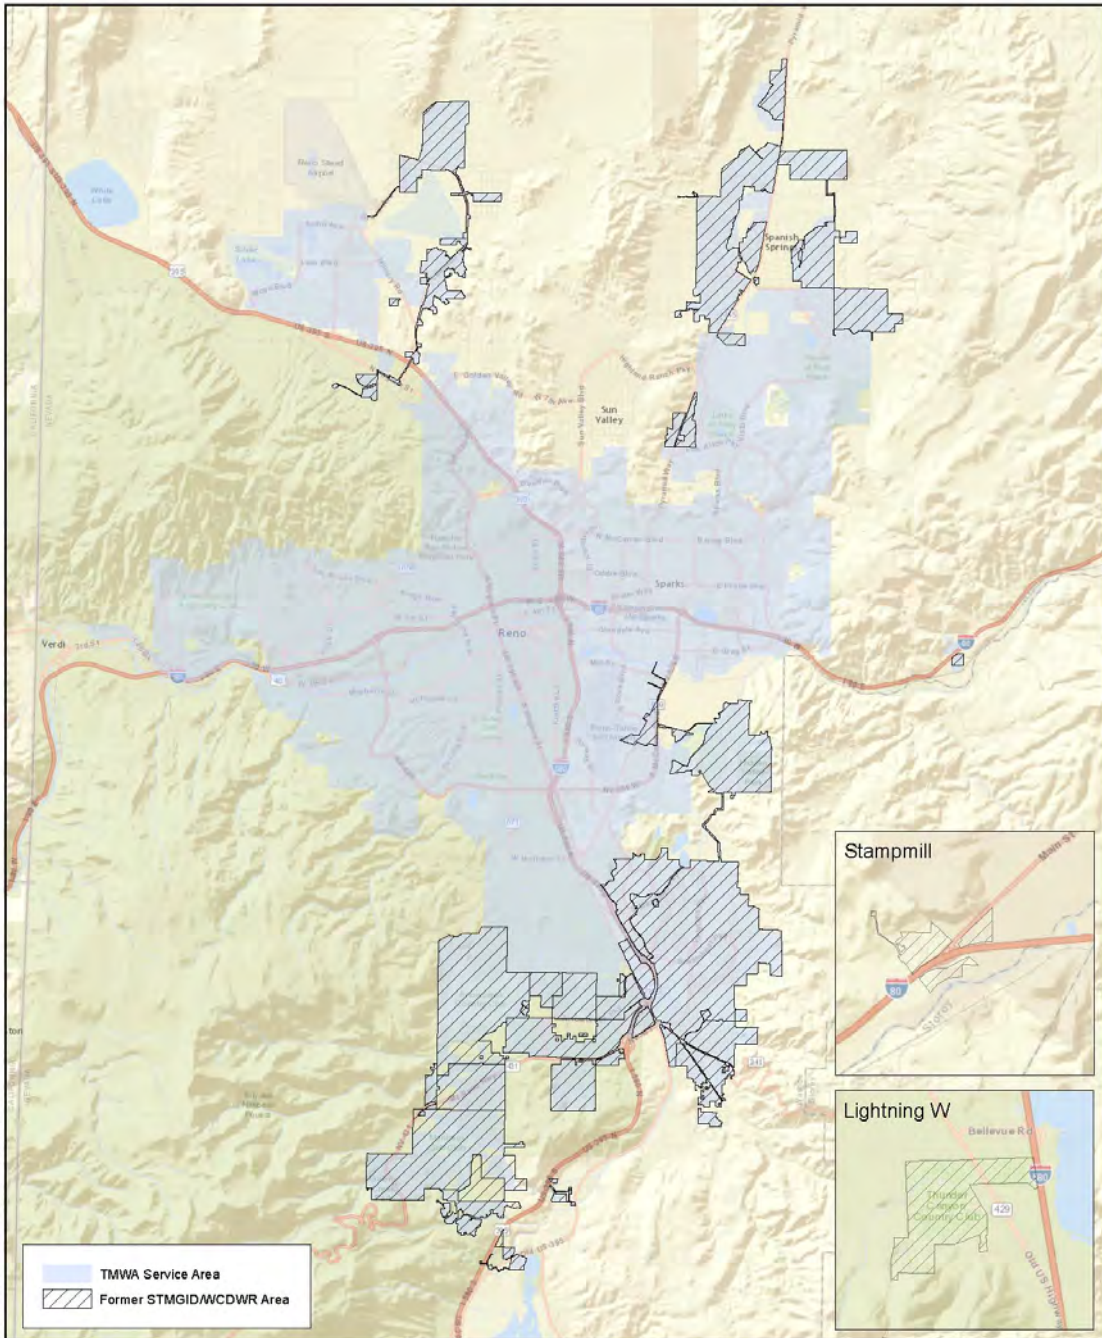

W:\projects\Engineering\CIP\projects\2016\3611\_CUSTOMER\_CIP\_2017\_TMWA.mxd

**TRUCKEE MEADOWS WATER AUTHORITY**  
Quality. Delivered.

**FY 2017-2021 CIP  
CUSTOMER SERVICE OUTLAYS  
SUMMARY**

DATE: 5/3/2016  
MAP BY: JK  
REQUESTED BY: LK  
SCALE: 1 in = 3 miles

**NORTH**  
HAD 83 NEVADA STATE PLANE WEST FEET

## Customer Service Outlays

### Meter Reading Equipment FY 2017 - 2021


**FUNDING TIMELINE:**

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
3	Customer Rates	Meter Reading Equipment	-	60	-	60	-	120

**PROJECT DESCRIPTION:** TMWA utilizes a multiple meter reading systems in which the transmitters attached to the meters send a signal out to be collected by data collectors. These collectors are mounted in the meter reading vehicles or on various mountain peaks surrounding the valley. TMWA is anticipating replacing units that have degraded.

**SCHEDULE:** Will need to purchase equipment on an as needed basis.

**PROJECT:**

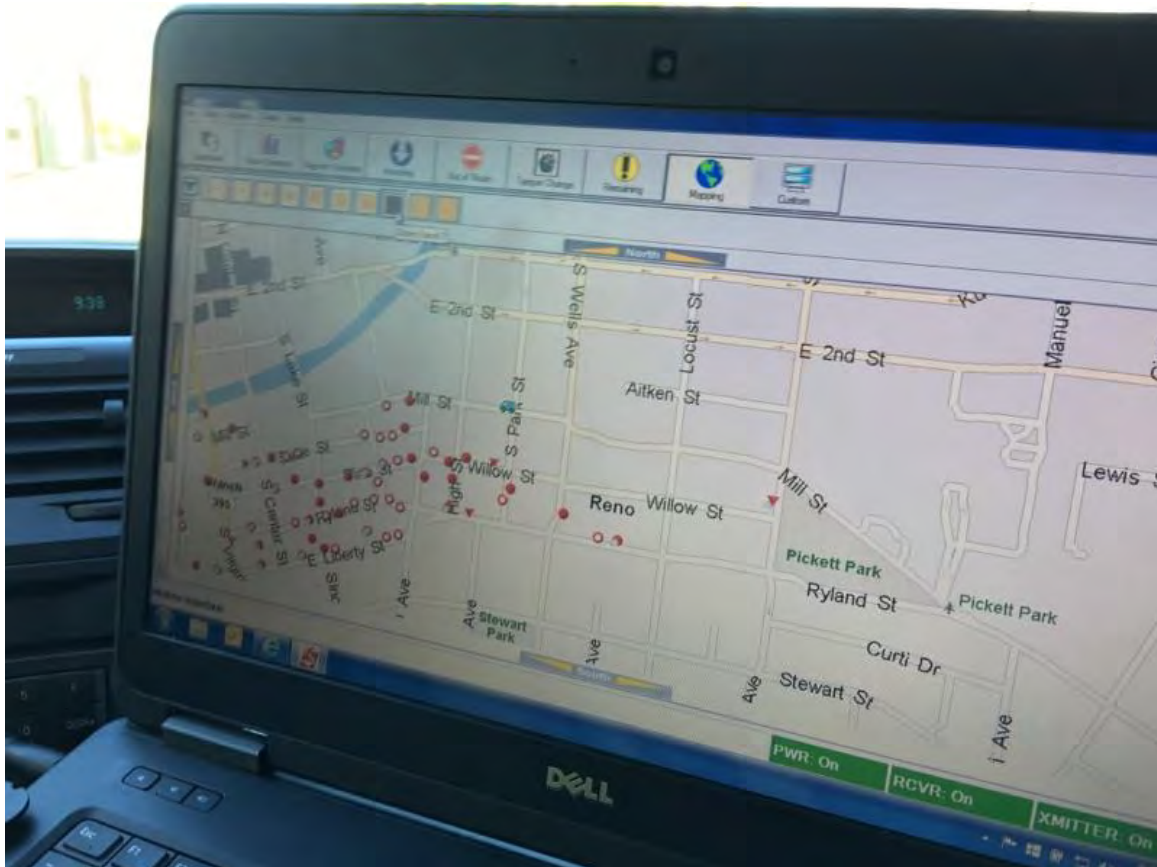

## Customer Service Outlays

### New Business Meters FY 2017 – 2021

#### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
2	Developer Fees	New Business Meters	350	350	350	175	100	1,325

**PROJECT DESCRIPTION:** All new water services are required to be metered. Meters are purchased by TMWA and installed for new development. New business fees pay for these installations.

**SCHEDULE:** As development picks up, more meters will need to be purchased.

#### PROJECT:



## Customer Service Outlays

### Mueller Pit Replacements Former Washoe County FY 2017 – 2021

#### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
1	Customer Rates	Mueller Pit Replacements former Washoe County	125	125	125	375	125	875

**PROJECT DESCRIPTION:** The Mueller metering pits are a very high maintenance metering facility and are prone to leaks and failures. TMWA plans to replace these facilities in response to leaks and or subsidence of these facilities.

**SCHEDULE:** Equipment and employee needs are evaluated and updated annually.

#### PROJECT:



## Customer Service Outlays

### Mueller Pit Replacements Former STMGID FY 2017 – 2021

#### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
1	Reserve	Mueller Pit Replacements former STMGID	75	75	75	75	75	375

**PROJECT DESCRIPTION:** The Mueller metering pits are a very high maintenance metering facility and are prone to leaks and failures. TMWA plans to replace these facilities to leaks and or subsidence of these facilities.

**SCHEDULE:** Equipment and employee needs are evaluated and updated annually.

#### PROJECT:



## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

## Customer Service Outlays

## Meter – ERT-RTR Replacements FY 2017 – 2021


## FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
1	Customer Rates	Meter - ERT-RTR Replacements	1,250	1,250	1,250	1,250	1,250	6,250

**PROJECT DESCRIPTION:** Meter/ERT/RTR replacements are required annually for approximately 7% of TMWA’s metered services. Meters have an expected service life of 20-25 years. ERTs and RTRs have an expected service life of at least 15 years. TMWA is upgrading these devices to the 100w class which will allow for fixed based meter readings and ability to read meters remotely for purposes of move-in and move-out meter reading cut-off without the need for a truck roll. In addition, we have taken on 23,000 Sensus meters of a varying age, as well as different meter reading systems.

**SCHEDULE:** These are both replaced systematically as well as on an as needed basis.

## PROJECT:

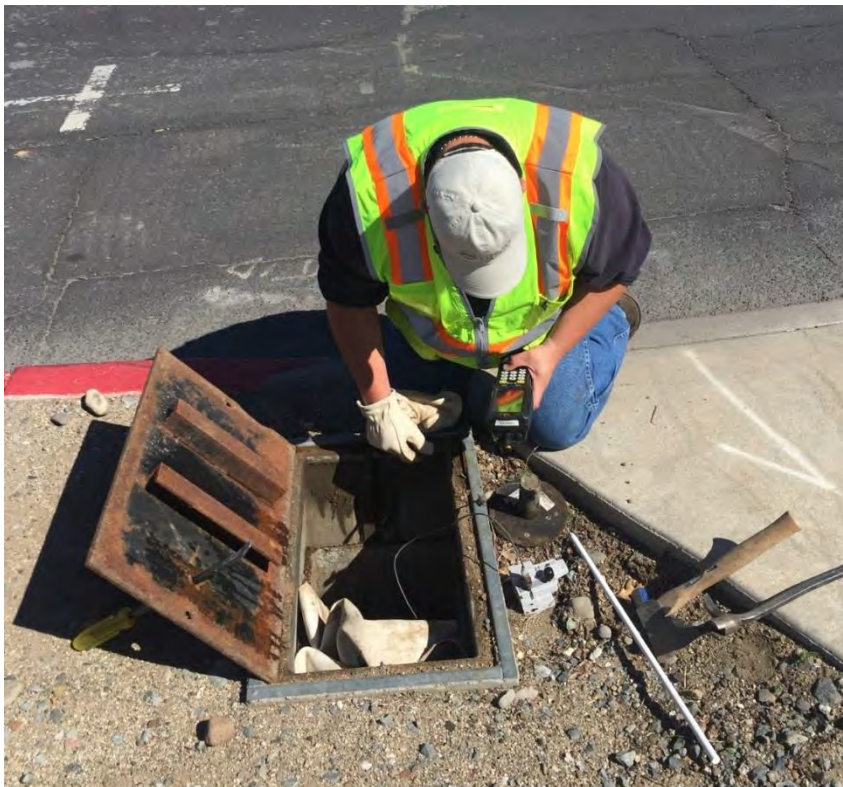

## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

## ADMINISTRATIVE OUTLAYS

### Summary

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
2	Customer Rates	GIS System Mapping Equipment	40	40	40	40	40	200
2	Customer Rates	Desktop Computer Upgrades	100	100	100	100	100	500
2	Customer Rates	Server/Storage upgrades	275	175	175	175	175	975
2	Customer Rates	Network Security Upgrades	150	150	150	150	150	750
2	Customer Rates	Application Software Acquisitions	150	150	150	150	150	750
3	Customer Rates	Furniture -Office Equipment	50	50	50	50	50	250
1	Customer Rates	Dump trucks/Vac Trucks/Backhoe Replacements	125	-	-	-	-	125
1	Customer Rates	Crew Trucks / Vehicles	690	823	570	584	652	3,319
2	Customer Rates	Security-ER Projects	150	150	150	150	150	750
1	Customer Rates	Emergency Operations Annex-Design	150	-	-	-	-	150
1	Customer Rates	Corporate Office Expansion-Design	150	-	-	-	-	150
<b>Subtotal Administrative Outlays</b>			<b>2,030</b>	<b>1,638</b>	<b>1,385</b>	<b>1,399</b>	<b>1,467</b>	<b>7,919</b>

## Administrative Outlays

### GIS System Mapping Equipment FY 2017 – 2021

#### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
2	Customer Rates	GIS System Mapping Equipment	40	40	40	40	40	200

**PROJECT DESCRIPTION:** TMWA will have to update mapping equipment on a periodic basis to keep up with changes in technology; and to replace existing equipment as it reaches obsolescence.

**SCHEDULE:** Equipment is replaced and/or purchase as needed.

#### PROJECT:



## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

**Administrative Outlays****Desktop Computer Upgrades FY 2017 – 2021****FUNDING TIMELINE:**

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
2	Customer Rates	Desktop Computer Upgrades	100	100	100	100	100	500

**PROJECT DESCRIPTION:** TMWA utilizes a computer refresh program to ensure employees are provided with the latest technological tools to stay productive in their work. TMWA has over 250 desktop and laptop computing resources in service, with approximately one-quarter needing to be changed out each year due to warranty arrangements, asset age, or staffing needs. TMWA annually completes a full inventory of all IT assets to make an appropriate determination of the required resource replacement.

**SCHEDULE:** Spending would be determined on an as needed basis.

**PROJECT:**

## Administrative Outlays

### Server/Storage/Operating System Software Upgrades FY 2017 - 2021

#### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
2	Customer Rates	Server / Storage / Operating System Software upgrades	275	175	175	175	175	975

**PROJECT DESCRIPTION:** TMWA currently has over 50 physical servers and 150 virtual servers, hosting a variety of enterprise software applications that support TMWA's daily business operations. All physical servers are typically purchased with a three year warranty, with the expectation that they will reach the end of their system life cycle in a three to five year time frame, requiring a replacement. TMWA annually reviews its server platforms and can option a strategy of warranty extension, if cost effective, rather than outright hardware replacement. All servers require an Operating System Software license to run. Operating System Software is upgraded only when the current release is obsolete or a newer version offers a significant advantage over the current iteration.

**SCHEDULE:** Spending occurs only on an as needed basis.

#### PROJECT:



## Administrative Outlays

### Network Security Upgrades FY 2017 – 2021

#### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
2	Customer Rates	Network Security Upgrades	150	150	150	150	150	750

**PROJECT DESCRIPTION:** As a leading water purveyor for a major metropolitan area, TMWA is reliant on the internet for employee productivity enhancement and providing valuable customer information and outreach. Such dependency on the internet also carries a significant degree of risk, as it makes TMWA a major target for external security threats looming within globalized networks. To offset this risk and combat network threats, a variety of security specific hardware and software solutions are used, weaving them into a layered deployment strategy called Defense in Depth. In order to continually evolve and reinforce this Defense in Depth strategy and effectively fight new unforeseen threats, TMWA must continually acquire new security platforms that adapt to the continually changing security landscape.

**SCHEDULE:** The network security is constantly monitored and upgraded as needed.

#### PROJECT:



## Administrative Outlays

### Application Software Acquisitions FY 2017 – 2021

#### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
2	Customer Rates	Application Software Acquisitions	150	150	150	150	150	750

**PROJECT DESCRIPTION:** In the modern computerized work place, software applications are key to providing staff with the essential functionality to perform their job roles. TMWA must constantly seek out and procure the latest in innovative software applications, in order to meet the evolving efficiency and productivity demands of staff.

**SCHEDULE:** Application software is updated as needed.

**Project:**



## Administrative Outlays

### Furniture – Office Equipment FY 2017 – 2021

**FUNDING TIMELINE:**

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
3	Customer Rates	Furniture -Office Equipment	50	50	50	50	50	250

**PROJECT DESCRIPTION:** A small provision is made each year for furniture requirements if necessary.

**SCHEDULE:** Furniture and office equipment is purchased or replaced as needed.

**PROJECT:**



## Administrative Outlays

### Dump Trucks/Vac Trucks/Backhoe Replacements FY 2017 – 2021

#### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
1	Customer Rates	Dump trucks/Vac Trucks/Backhoe Replacements	125	-	-	-	-	125

**PROJECT DESCRIPTION:** TMWA employs dump trucks with backhoe trailers to move backhoes to water main leak sites, meter retrofit sites and other tasks reducing travel wear and tear on backhoes. Dump truck/backhoe equipment configurations are essential for efficient field tasks. TMWA will eventually need to replace backhoes purchased early in TMWA operations. This equipment is used daily and may be reaching performance handbook life cycles although moving this equipment by trailer extends the life of this equipment considerably.

**SCHEDULE:** Equipment and employee needs are evaluated and updated annually.

#### PROJECT:



## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

## Administrative Outlays

### Crew Trucks/Vehicles FY 2017 - 2021

**FUNDING TIMELINE:**

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
1	Customer Rates	Crew Trucks / Vehicles	690	823	570	584	652	3,319

**PROJECT DESCRIPTION:** TMWA's service fleet consists of light duty and heavy duty crew trucks. TMWA plans to cycle the light crew fleet over a period of seven to ten years. Spending is determined annually depending on vehicle availabilities and other factors. Spending only occurs if justified. TMWA's fleet cycles older vehicles to the treatment plants or other less demanding activities prior to disposal at auction. TMWA has scaled back spending on light vehicles for the past several years and a number of vehicles will be in excess of ten years old and greater than 120,000 miles of duty.

**SCHEDULE:** Equipment and employee needs are evaluated and updated annually.

**PROJECT:**

## Truckee Meadows Water Authority FY 2017-2021 Capital Improvement Plan

## Administrative Outlays

### Security-ER Projects FY 2017 – 2021

**FUNDING TIMELINE:**

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
2	Customer Rates	Security-ER Projects	150	150	150	150	150	750

**PROJECT DESCRIPTION:** Various ongoing improvements to security infrastructure are required to protect TMWA facilities. Perpetual upgrades to video surveillance and control access infrastructure are necessary in order to provide pertinent and real time information to TMWA in the event of unauthorized access to TMWA property. TMWA has performed vulnerability assessment studies in the past and reviews the applicability of the findings to continually improve physical security as needed. In addition, TMWA is preparing a new disaster recovery plan with procedures to recover and protect water system operations.

**SCHEDULE:** Upgrades to security projects is ongoing and the disaster recovery plan is scheduled for completion in FY 2017.

**PROJECT LOCATION:** Various locations at treatment plants, at well sites, storage area for water fill station manifolds.

## Administrative Outlays

### Emergency Operations Annex-Design FY 2017

#### FUNDING TIMELINE:

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
1	Customer Rates	Emergency Operations Annex-Design	150	-	-	-	-	150

**PROJECT DESCRIPTION:** TMWA is currently in the planning and conceptual design phase for a Primary Emergency Operations Center (EOC) with potential for Disaster Recovery (DR) capacity. TMWA's EOC will relocate from the current location at the corporate office to the Chalk Bluff Water Treatment Plant. Which includes scope review, design, and contract bid packages, bid and award, construction, and testing. Potential emergency operations would include responding to earthquakes, floods, or other emergency related events. Disaster Recovery includes providing a system to backup and restore all key operating systems to operational status.

**SCHEDULE:** Design, bid and build in FY 2017 to include design, fabrication, installation of two construction water fill stations at Glendale and Chalk Bluff Water Treatment Plant, construction of water fill stations at four tank sites, standby power retrofits at four existing wells and ten portable water fill manifold stations.

## Administrative Outlays

### Corporate Office Expansion-Design FY 2017 - 2021

**FUNDING TIMELINE:**

Priority	Funding Source	Description	FY17	FY18	FY19	FY20	FY21	CIP Total
1	Customer Rates	Corporate Office Expansion-Design	150	-	-	-	-	150

**PROJECT DESCRIPTION:** TMWA anticipates design of only the corporate building extension only. A decision to construct will be held in abeyance until employee count justifies construction.

**SCHEDULE:** Anticipated design will occur in FY 2017.

**PROJECT:**



**TMWA**  
Operations Facility Addition Study

Schematic Design Option 2

**H+K ARCHITECTS**  
5485 Brent Corporate Dr., Ste. 100  
8906, Nevada 89511-2262  
P 775-332-6640  
F 775-332-6642  
hkarchitects.com



January 15, 2016  
H+K Project No.: 15236  
**SD102**